

DATA CENTER SOLUTIONS



CONTENTS

PLIERS	7 - 17
SCREWDRIVERS	18 - 24
WRENCHES	25 - 32
MECHANICAL TOOL TROLLEY	33 - 44
TOOL ASSORTMENTS	45 - 47
TEST EQUIPMENT	48 - 52
POWER TOOLS	53 - 55
CONSUMABLES	56 - 59
SAFETY-PPE	60 - 65
TECHNICAL CHEMICALS	66 - 69
SYSTEMS	70 - 74




— ZEBRA —

50th

ANNIVERSARY

— 1976 - 2026 —

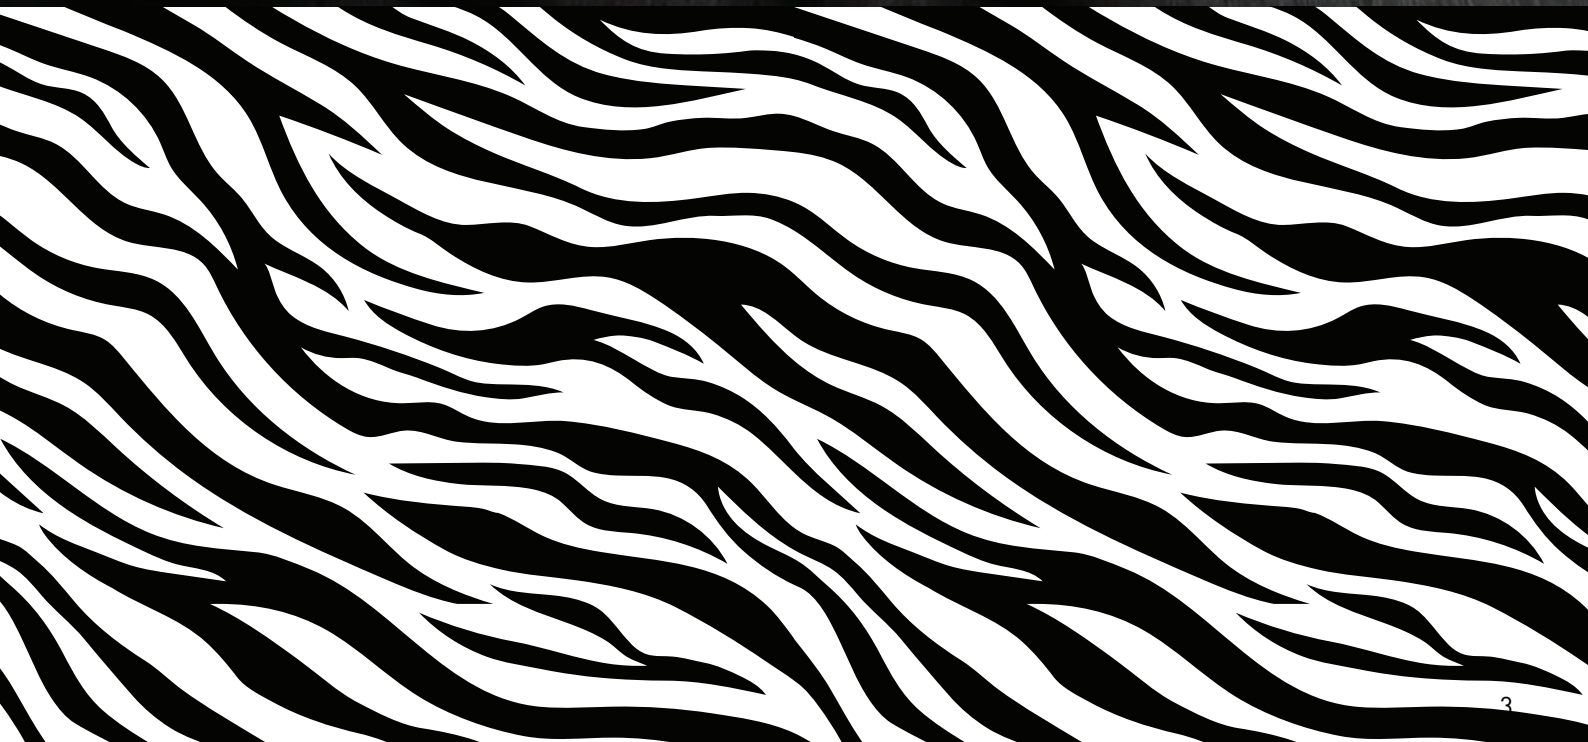



MAXIMIZING UPTIME THROUGH SMART OPERATIONS

Every minute of downtime has a cost. WPS delivers intelligent workplace and inventory solutions that ensure maintenance teams have immediate access to the right tools, PPE, spare parts, and consumables keeping critical operations running without interruption.



INTELLIGENT INVENTORY MANAGEMENT

Replace manual inventory processes with automated dispensing, RFID-enabled tracking, and real-time stock visibility. Our solutions optimize inventory levels, eliminate unnecessary stockholding, and ensure mission-critical materials are always available when required.



EMPOWERING MAINTENANCE TEAMS

Enable technicians to work faster and more efficiently with organized storage systems, controlled tool access, and automated replenishment. By reducing time spent searching for materials or managing inventory, maintenance teams can focus on what matters most: maintaining critical infrastructure.



COMPLIANCE, SAFETY & ASSET PROTECTION

Support operational excellence with secure storage solutions for hazardous materials, flammable products, and lithium batteries while maintaining full traceability of inventory and issued assets. Designed to support safety standards and regulatory compliance, WPS solutions help protect people, facilities, and business continuity.



COMPLETE VISIBILITY & OPERATIONAL CONTROL

Gain actionable insights into inventory consumption, asset utilization, and material movement through intelligent reporting and digital monitoring. Data-driven visibility enables better planning, reduced waste, and more informed operational decisions across your facility.



ENGINEERED FOR CRITICAL ENVIRONMENTS

From enterprise data centers and hyperscale campuses to colocation facilities and integrated facility management operations, WPS solutions enhance operational resilience, improve technician productivity, and create smarter, safer, and more efficient workplaces supporting the continuous availability that mission-critical environments demand.




VENDING MACHINE SYSTEMS

Würth Smart Vending Machine is an automated industrial vending solution that securely dispenses tools, PPE, consumables, and MRO products directly at the point of use. Users authenticate with an RFID card, PIN, or company credentials to access authorized products. Every withdrawal is automatically recorded, ensuring complete traceability while triggering automatic replenishment when stock reaches predefined levels. The system provides 24/7 product availability, controlled access, and real-time inventory management.

Key Benefits

- 24/7 product availability
- Secure user authentication and access control
- Complete consumption tracking by employee or department
- Automatic stock replenishment
- Reduces product misuse and overconsumption
- Lowers inventory and procurement costs

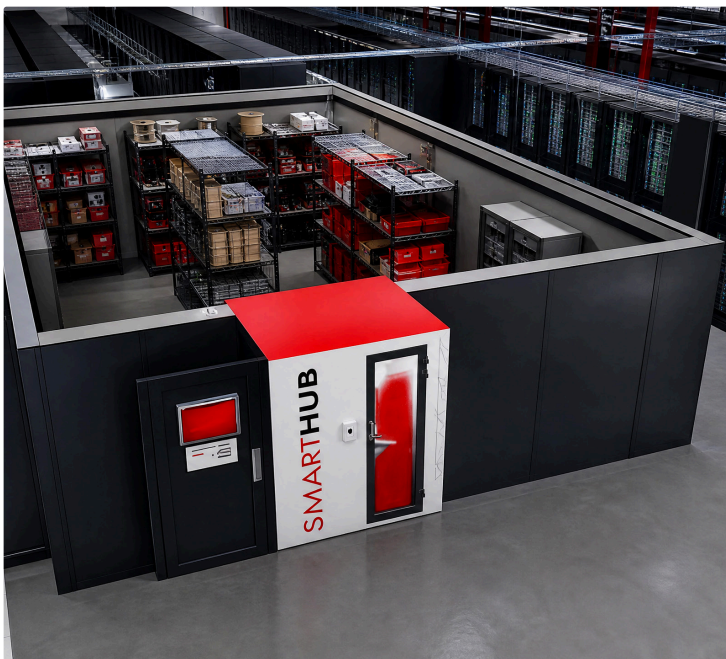

THE SMART HUB

is a fully automated, digitally connected inventory management solution that provides controlled, 24/7 access to essential maintenance, repair, and operations (MRO) products. Designed around the principle of ensuring availability with precision, the system combines secure RFID access, intelligent product recognition, automated checkout, real-time inventory visibility, consumption tracking, and automated replenishment to ensure the right product is available at the right time, in the right quantity.



1 PLIERS

2 SCREWDRIVERS

3 WRENCHES

4 MECHANICAL
TOOL TROLLEY

5 TOOL
ASSORTMENTS

6 TEST EQUIPMENT

7 POWER TOOLS

8 CONSUMABLES

9 SAFETY-PPE

10 TECHNICAL
CHEMICALS

11 SYSTEMS

PLIERS



VDE pliers assortment, IEC 60900

4 pieces

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long tool life and precision of gripping and cutting surfaces
- Ergonomic and slip-free 2-component comfort handle with wide VDE collar for secure working



Contents for Art. No.

0714 01 580	1 x VDE wire stripping pliers, IEC 60900; 1 x VDE side cutters DIN ISO 5749 IEC 60900; 1 x VDE combination pliers DIN ISO 5746 IEC 60900; 1 x VDE snipe nose pliers DIN ISO 5745, IEC 60900
--------------------	---

Art. No. 0714 01 580

P. Qty./assortment 1

- Combination pliers with extra-long blade also suitable for thicker cables
- Stripping pliers with opening spring for automatic opening
- Snipe nose pliers with tips for high bending stresses
- Side cutters with slim head shape for optimal accessibility



Contents for Art. No.

0714 01 581	1 x VDE side cutters DIN ISO 5749 IEC 60900; 1 x VDE combination pliers DIN ISO 5746 IEC 60900; 1 x VDE snipe nose pliers DIN ISO 5745, IEC 60900; 1 x VDE cable cutters with single blade
--------------------	--

Art. No. 0714 01 581

P. Qty./assortment 1

VDE pliers assortment, combi IEC 60900

8 pcs.

- For work on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- Pliers made from high-quality tool steel for long service life and precise gripping and cutting surfaces
- Stripping pliers with opening spring for automatic opening
- Side cutters with slim head shape for optimum accessibility
- Snipe nose pliers with tips resistant to high bending strain
- Ergonomic and slip-proof 2-component comfort handle for safe working



Contents for Art. No.

0714 01 582	VDE screwdriver Flat slotted: 1 x 0.4 x 2.5 mm, 1 x 0.8 x 4.0 mm, 1 x 1.2 x 6.5 mm; VDE screwdriver PH recessed head: 1 x PH1, 1 x PH2; 1 x VDE wire stripping pliers, IEC 60900; 1 x VDE side cutters DIN ISO 5749 IEC 60900; 1 x VDE snipe nose pliers DIN ISO 5745, IEC 60900
--------------------	--

Art. No. 0714 01 582

P. Qty./assortment 1

VDE pliers assortment, IEC 60900
4 pcs.

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long service life and precision of gripping and cutting surfaces
- 1-component handle with wide VDE collar for safe working
- Combination pliers with extra-long blade also suitable for thicker cables
- Round-nose pliers for bending wire eyelets
- Snipe-nose pliers with tips for high bending stresses
- Side cutters with slim head shape for optimum accessibility



Contents for Art. No.	
0715 01 92	1 x VDE combination pliers DIN ISO 5746 IEC 60900; 1 x VDE snipe nose pliers DIN ISO 5745 IEC 60900; 1 x VDE snipe nose pliers with blade DIN ISO 5745, IEC 60900; 1 x VDE side cutters, DIN ISO 5749 IEC 60900

Art. No. 0715 01 92
P. Qty./assortment 1



Contents for Art. No.	
0715 01 93	1 x VDE combination pliers DIN ISO 5746 IEC 60900; 1 x VDE snipe nose pliers with blade DIN ISO 5745, IEC 60900; 1 x VDE side cutters, DIN ISO 5749 IEC 60900; 1 x VDE cable shears, forged head

Art. No. 0715 01 93
P. Qty./assortment 1

VDE wire stripping pliers, IEC 60900

Precise, effortless stripping of cables and wires with plastic or rubber insulation.

- For working on live parts up to 1000 V (AC) and up to 1500 V (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long service life and precision of cutting surfaces
- Opening spring opens pliers automatically

2-COMPONENT COMFORT HANDLE



Length: 160 mm

Art. No. 0714 01 570

P. Qty./unit 1/10



1-COMPONENT HANDLE

Length: 160 mm

Art. No. 0715 01 95

P. Qty./unit 1/10



VDE Combination Pliers DIN ISO 5746, IEC 60900

For gripping, holding and cutting hard and soft wires and cables

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long tool life and precision of gripping and cutting surfaces
- Extra-long blade also suitable for thicker cables
- Single-component handle with wide VDE collar for safe working
- Inductively hardened precision blades
- Burner port for gripping round materials
- Surface entirely ground and chrome-plated
- Lap joint



Art.-No.	0715 01 81	0715 01 82	0715 01 83
Length (L)	165 mm	180 mm	200 mm
Length in inches (L)	6-1/4 in	7 in	8 in
Max. medium wire diameter cutting capacity	3,1 mm	3,4 mm	3,8 mm
Max. hard wire diameter cutting capacity	2 mm	2,2 mm	2,5 mm
Max. cable diameter cutting capacity in aluminium/copper	10 mm	12 mm	13 mm
P. Qty./unit	1/10	1/10	1/10

VDE combination pliers DIN ISO 5746 IEC 60900

For gripping, holding and cutting hard and soft wires and cables

Art. No.	0714 01 574	0714 01 575	0714 01 576
Length (L)	160 mm	180 mm	200 mm
Length in inches (L)	6-1/4 in	7 in	8 in
Max. medium wire diameter cutting capacity	3.1 mm	3.4 mm	3.8 mm
Max. hard wire diameter cutting capacity	2 mm	2.2 mm	2.5 mm
Max. cable diameter cutting capacity in aluminium/copper	10 mm	12 mm	13 mm
P. Qty./unit	1 / 10	1 / 10	1 / 10



VDE-Flachrundzange DIN ISO 5745 IEC 60900

Zum Greifen, Halten sowie Schneiden weicher und harter Drähte und Kabel

- Unter Beachtung der vorgeschriebenen Sicherheitsmaßnahmen, für Arbeiten unter Spannung bis 1.000 Volt (AC), bis 1.500 Volt (DC)
- Hochwertiger Werkzeug-Stahl gewährleistet lange Standzeit der Präzisionsspitzen und Schneidflächen
- Elastische Spitzen für hohe Beanspruchung, insbesondere bei Biegebelastung
- Ergonomischer und rutschfester 2-Komponenten-Komfortgriff mit breitem VDE-Kragen für sicheres Arbeiten
- Schneiden sind zusätzlich induktiv gehärtet
- Oberfläche ist rundum geschliffen und verchromt
- Greifflächen sind gezahnt
- Eingelegtes Gelenk



Art.-Nr.	0714 01 577	0714 01 578	0714 01 579	0714 01 596
Länge (L)	210 mm	210 mm	160 mm	160 mm
Länge Zoll (L)	8-1/4 in	8-1/4 in	6-1/2 in	6-1/2 in
Backenlänge (L3)	76 mm	72 mm	50 mm	46 mm
Backenbreite (W3)	17,5 mm	17,5 mm	16,5 mm	16,5 mm
Backendicke (T1)	9,5 mm	9,5 mm	9 mm	9 mm
Winkel der Backen		40 Grad		40 Grad
Backenspitzenbreite (W4)	4 mm	4 mm	3 mm	3 mm
Backenspitzendicke (T2)	3 mm	3 mm	2,5 mm	2,5 mm
ISO	5745	5745	5745	5749
VE/Stück	1/10	1/10	1/10	1/10

VDE-Flachrundzange mit Schneide DIN ISO 5745 IEC 60900

Zum Greifen und Halten sowie Schneiden weicher und harter Drähte und Kabel

- Unter Beachtung der vorgeschriebenen Sicherheitsmaßnahmen, für Arbeiten unter Spannung bis 1.000 Volt (AC), bis 1.500 Volt (DC)
- Hochwertiger Werkzeug-Stahl gewährleistet lange Standzeit der Präzisionsspitzen und Schneidflächen
- Elastische Spitzen für hohe Beanspruchung, insbesondere bei Biegebelastung
- 1-Komponenten-Griff mit breitem VDE-Kragen für sicheres Arbeiten
- Induktiv gehärtet Schneiden
- Oberfläche rundum geschliffen und verchromt
- Gezahnte Greifflächen
- Eingelegtes Gelenk



Länge (L)	210 mm
Länge Zoll (L)	8-1/4 in
Backenlänge (L3)	74 mm
Backenbreite (W3)	17,5 mm
Backendicke (T1)	9,5 mm
Backenspitzenbreite (W4)	3 mm
Backenspitzendicke (T2)	2,5 mm
Werkstoff	Stahl
Oberfläche	Verchromt
ISO	5745
Werkstoff Griff	Kunststoff

Art.-Nr.	0715 01 85	0715 01 86
Winkel der Backen		45 Grad
VE/Stück	1/10	1/10



VDE round-nose pliers DIN ISO 5745 IEC 60900

For bending wire eyelets

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long service life of precision tips
- Ergonomic and non-slip 2-component comfort handle with wide VDE collar for safe working
- Surface: Entirely ground and chromium-plated
- Jaws: Round, smooth
- Joint: Lap joint

Length: 160 mm

Art. No. 0714 01 595

P. Qty./unit 1/10



VDE electrical installation pliers IEC 60900

3 tools in one set of pliers: For cutting, stripping and removing insulation from electrical cables.

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- Easy to use, no need to switch tools
- Side cutter function, cable and insulation stripping in ergonomic pulling motion

Length: 170 mm

Art. No. 0714 01 588

P. Qty./unit 1



VDE snipe nose pliers DIN ISO 5745 IEC 60900

For bending wire eyelets

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long service life of precision tips
- 1-component handle with wide VDE collar for safe working
- Surface entirely ground and chromium-plated
- Round, smooth jaws
- Lap joint

Length: 160 mm

Art. No. 0715 01 84

P. Qty./unit 1/10



VDE snipe nose pliers DIN ISO 5745, IEC 60900

For gripping and holding

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long service life of gripping jaws
- 1-component handle with wide VDE collar for safe working
- Surface entirely ground and chromium-plated
- Serrated gripping surfaces
- Lap joint

Length: 160 mm

Art. No. 0715 01 91

P. Qty./unit 1/10



VDE side cutters DIN ISO 5749 IEC 60900

For cutting hard and soft wires and cables, including in hard-to-reach places

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- Strength-saving, clean cutting thanks to milled precision cutting edge
- High-quality tool steel ensures long tool life and precision of cutting surfaces

Art. No.	0714 01 571	0714 01 572	0714 01 573
Length (L)	140 mm	160 mm	180 mm
Max. medium wire diameter cutting capacity	2.5 mm	2.8 mm	3 mm
Max. hard wire diameter cutting capacity	1.8 mm	2 mm	2.5 mm
P. Qty./unit	1/10	1/10	1/10


VDE power side cutters DIN ISO 5749, IEC 60900

For cutting piano wire, hard and soft wire

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- Strength-saving, clean cutting thanks to milled precision cutting edge
- High-quality tool steel ensures long tool life and precision of blades including under maximum stresses
- Ergonomic and slip-free 2-component comfort handle with wide VDE collar for secure working
- Blades: inductively hardened precision blades
- Surface: entirely ground and chrome-plated
- Joint: Lay-on, axis forged on

Length: 200 mm

Art. No. 0714 01 597

P. Qty./unit 1/10


VDE side cutters, DIN ISO 5749 IEC 60900

For cutting hard and soft wires and cables, including in hard-to-reach places

- For working on live parts up to 1000 V (AC) and up to 1500 V (DC), observing all prescribed safety precautions
- Strength-saving, clean cutting thanks to milled precision cutting edge
- High-quality tool steel ensures long service life and precision of cutting surfaces
- Slim head shape for optimum accessibility
- 1-component comfort handle with wide VDE collar for secure working
- Cutting edges: Inductively hardened, precision cutting edges
- Surface: Entirely ground and chrome-plated
- Joint: Lap joint

Length: 140 mm

Art. No. 0715 01 87

P. Qty./unit 1/10

Length: 160 mm

Art. No. 0715 01 88

P. Qty./unit 1/10


VDE heavy-duty side cutters, DIN ISO 5749 IEC 60900

For cutting piano wire, hard and soft wire

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- Strength-saving, clean cutting thanks to milled precision cutting edge
- High-quality tool steel ensures long service life and precision of blades, even under maximum loads
- Single-component handle with wide VDE collar for safe working
- Inductively hardened precision blades
- Surface entirely ground and chrome-plated
- Lap joint with forged-on axis

Length: 180 mm

Art. No. 0715 01 89

P. Qty./unit 1/10





VDE cable shears with dual blade

**For cutting copper and aluminium cable;
for precutting and recutting**

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long tool life and precision of cutting surfaces
- Special blade geometry facilitates easy and distortion-free cutting action through single or multi-stranded cable
- 2-stage operation with dual blades for optimum transmission of forces
- Ergonomic and slip-free 2-component comfort handle with wide VDE collar for safe working
- Cutting: hardened precision blades
- Surface: ground and chrome-plated
- Joint: bolted and adjustable

Length: 210 mm

Art. No. 0714 01 586

P. Qty./unit 1/10



VDE cable cutters with single blade

For cutting copper and aluminium cable

- For working on live parts up to 1000 V (AC) and up to 1500 V (DC), observing all prescribed safety precautions
- Long service life and precision of cutting surfaces
- Easy and distortion-free cutting action through single- or multi-stranded cable
- Optimal power transmission
- Ergonomic and non-slip 2-component comfort handle with wide VDE collar
- Hardened, precision cutting edges
- Surface ground and chromium-plated
- Bolted and adjustable joint

Length: 160 mm

Art. No. 0714 01 585

P. Qty./unit 1/10



VDE cable shears, forged head

IEC 60900. For multi-stranded copper and aluminium cable

- For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC), observing all prescribed safety precautions
- High-quality tool steel ensures long service life and precision of cutting surfaces
- Special blade geometry facilitates easy and distortion-free cutting action through single or multi-stranded cable
- 1-component handle with wide VDE collar for safe working
- Cutting: hardened precision blades
- Surface: ground and chromium-plated
- Joint: bolted and adjustable

Length: 170 mm

Art. No. 0715 07 55

P. Qty./unit 1/10



VDE one-hand ratchet cutters

EN 60900, IEC 900

- Handle: Insulated sleeve, Non-slip
- Blade: For multi-strand copper and aluminium cables, Works without compressing cables, Hardened, Precision-ground
- Shears can be unlocked in any cutting position
- Pivot arms: One-handed operation, optimum lever transmission
- Joint: Ratchet mechanism

Length: 280 mm

Art. No. 0715 07 56

P. Qty./unit 1



VDE cable shears

Standard: EN 60900. IEC 900.

- Handles: Dip-insulated plastic, impact-resistant
- Cutting edge: Hardened, precision-ground -> works without compressing cables
- Pivot arms: Lever transmission -> i.e. minimal force required
- Joint: Screw joint, adjustable
- Head: Forged special steel, replaceable
- Application: Cutting, sheath stripping

Length: 580 mm

Art. No. 0715 07 53

P. Qty./unit 1



Insulated Safety Clamp 1000V

Art. No. 5997 770 866

P. Qty./unit 1



VDE gripping pliers Made of insulated plastic

Particularly suitable for applications in electromobility

- Reduces the risk of short circuit thanks to the purely plastic design
- Comfortable working thanks to the 2-component handles with their soft and non-slip grip zone
- Robust pliers shape due to the fibreglass-reinforced plastic

Art. no.	0714 01 605
Length (L)	180 mm
Jaws length	34 mm
Jaws width	32 mm
Jaw-tips thickness	11 mm
Jaw-tips width	9 mm
Standards	EN 60900
Jaw design	Flat grooves
Product weight (per item)	120 g
Material	Plastic reinforced with glass fibre
Material of grip handle	TPE (rubber)
P. Qty./unit	1



VDE snipe nose pliers Made of insulated plastic

Particularly suitable for applications in electromobility

- Reduces the risk of short circuit thanks to the purely plastic design
- Comfortable working thanks to the 2-component handles with their soft and non-slip grip zone
- Robust pliers shape due to the fibreglass-reinforced plastic

Art. no.	0714 01 606
Length (L)	220 mm
Jaws length	75 mm
Jaws width	32 mm
Jaw-tips thickness	5 mm
Jaw-tips width	10 mm
Standards	EN 60900
Jaw design	Straight shape, Fine grooves
Product weight (per item)	130 g
Material	Plastic reinforced with glass fibre
Material of grip handle	TPE (rubber)
P. Qty./unit	1



Live-line Plastic clamp

Insulated plastic clamp for fixing tarpaulins.

Art. no.	0714 01 607
Jaws width	15 mm
Min. width of mouth	35 mm
Grip force	25 N
Width	106 mm
Length	150 mm
Product weight (per item)	60 g
P. Qty./unit	1



WHAT DOES



MEAN?

VDE tools are suitable for working on live parts up to 1000 V (AC) and up to 1500 V (DC), observing all prescribed safety precautions.

VDE is the German abbreviation for “**Association for Electrical, Electronic and Information Technologies**”, which is based in Germany and approves additionally product quality and the compliance with further high safety standards.

Once the yellow coating becomes visible, the tool is no longer usable and must be replaced.



SCREWDRIVERS



VDE precision screwdriver, flat slotted

For working on live parts up to 1000 volts (AC)
and up to 1500 volts (DC)

- Individually tested in water bath with 10 kV test voltage
- Marked with year of manufacture
- Cold impact test at -40°C (marking C)
- Blade: Circular blade insulated, burnished
- Output: DIN 5264-A, ISO 2380

Thickness of cutting edge x width of cutting edge	Blade length	Art. No.	P. Qty./unit
0.3 x 1.5 mm	40 mm	0613 486 015	1/10
0.3 x 1.8 mm	60 mm	0613 486 018	1/10
0.4 x 2 mm	60 mm	0613 486 020	1/10
0.4 x 2.5 mm	75 mm	0613 486 025	1/10
0.5 x 3 mm	75 mm	0613 486 030	1/10



VDE precision screwdriver, PH recessed head

For working on live parts up to 1000 volts (AC)
and up to 1500 volts (DC)

- Routine test in water bath with test voltage 10 kV, identification marking with the year of manufacture
- Cold impact test at -40°C (marking C)
- Blade: Circular blade, insulated, bronzed, drive: ISO 8764-PH

Art. No.	0613 487 0	0613 487 00
Tip size	PH0	PH00
Blade length	60 mm	40 mm
P. Qty./unit	1/10	1/10



VDE precision screwdriver assortment, slotted/PH

7 pieces. Consisting of five slot and two Phillips screwdrivers.

Art. No. 0613 489 4

P. Qty./assortment 1



Contents for Art. No.

0613 489 4

VDE precision screwdriver, flat slotted: **1** x 0.3 x 1.5 mm, **1** x 0.3 x 1.8 mm, **1** x 0.4 x 2 mm, **1** x 0.4 x 2.5 mm, **1** x 0.5 x 3 mm; VDE precision screwdriver, PH recessed head: **1** x 0, **1** x 00

VDE screwdriver set

14-piece set comprising a handle, a precision engineering rotating cap and 12 interchangeable blades

Contents for Art. No.	
0613 900 14	1 x Handle VDE; Replacement blade VDE: 1 x Slot, 0.4 x 2.5 mm, Length: 150 mm, 1 x Slot, 0.5 x 3.0 mm, Length: 175 mm, 1 x Slot, 0.6 x 3.5 mm, Length: 175 mm, 1 x Slot, 1.0 x 5.5 mm, Length: 175 mm, 1 x Slot, 1.2 x 6.5 mm, Length: 175 mm, 1 x PH1, Length: 155 mm, 1 x PH2, Length: 175 mm, 1 x PZ2, Length: 175 mm, 1 x TX10, Length: 175 mm, 1 x TX15, Length: 175 mm, 1 x TX25, Length: 175 mm

Art. No. 0613 900 14

P. Qty./assortment 1



VDE screwdriver set slotted/PZ recessed head

5 pcs: 1 x slotted 0.4 x 2.5; 1 x slotted 0.8 x 4.0; 1 x slotted 1.2 x 6.5; 1 x PZ1; 1 x PZ2

- Blade: Burnished, insulated
- Standard: Individually tested in line with IEC 60900:2004

Contents for Art. No.	
0613 963 35	VDE screwdriver Flat slotted: 1 x Slot, 0.4 x 2.5 mm, 1 x Slot, 0.8 x 4.0 mm, 1 x Slot, 1.2 x 6.5 mm; VDE screwdriver PZ recessed head: 1 x 1, 1 x 2

Art. No. 0613 963 35

P. Qty./unit 1



VDE screwdriver set, slotted/PH recessed head

5 pieces

- Blade: bronzed, insulated
- Standard: Individually tested in accordance with IEC 60900:2004

Contents for Art. No.	
0613 963 25	VDE screwdriver Flat slotted: 1 x Slot, 0.4 x 2.5 mm, 1 x Slot, 0.8 x 4.0 mm, 1 x Slot, 1.2 x 6.5 mm; VDE screwdriver PH recessed head: 1 x 1, 1 x 2

Art. No. 0613 963 25

P. Qty./assortment 1



Replacement blade VDE

For VDE screwdrivers

Length: 155 mm

Art. No. 0613 900 01

P. Qty./unit 1/12

Length: 175 mm

Art. No. 0613 900 02

P. Qty./unit 1/12



Handle VDE

For VDE replacement blades

Art. No. 0613 900 1

P. Qty./unit 1/12



Replacement blade VDE

For VDE screwdrivers

Length: 150 mm

Art. No. 0613 900 025

P. Qty./unit 1/12

Length: 175 mm

Art. No. 0613 900 030

P. Qty./unit 1/12

Length: 175 mm

Art. No. 0613 900 035

P. Qty./unit 1/12

Length: 175 mm

Art. No. 0613 900 040

P. Qty./unit 1/12



VDE screwdriver set slotted/PH

5 pieces. Extra slim design.

- Blade burnished, reduced blade insulation diameter in critical working area
 - Effortless access to low-lying screw and spring elements
 - Prevents insulation from fraying
- Screw symbol on end of handle

Contents for Art. No.

0613 963 250	VDE screwdriver, flat slotted, ultra slim: 1 x 0.4 x 2.5 mm, 1 x 0.8 x 4 mm, 1 x 1 x 5.5 mm; VDE screwdriver, PH recessed head, extra slim: 1 x PH1, 1 x PH2
---------------------	---

Art. No. 0613 963 250

P. Qty./unit 1



VDE screwdriver TX set

6 pieces

- Blade: Burnished, insulated
- Tip: TX socket, Black Point
- Screw symbol and handle size on end of handle for quick identification
- Standard: IEC 60900:2012

Contents for Art. No.

0613 962 35	VDE screwdriver, TX: 1 x 8, 1 x 9, 1 x 10, 1 x 15, 1 x 20, 1 x 25, 1 x 30
--------------------	--

Art. No. 0613 962 35

P. Qty./assortment 1



VDE screwdriver Flat slotted

For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC)

- Blade: Burnished, insulated
- Tip: Based on DIN ISO 2380-1-B
- Individually tested in water bath with 10 kV test voltage
- Marked with year of manufacture
- Stricter cold impact test



Thickness of cutting edge x width of cutting edge	Blade length (A)	Handle length/handle width (B / C)	Art. No.	P. Qty./unit
0.4 x 2.5 mm	80 mm	83/27 mm	0613 631 025	1
0.5 x 3 mm	100 mm	83/27 mm	0613 631 03	1
0.6 x 3.5 mm	100 mm	83/27 mm	0613 631 035	1
0.8 x 4 mm	100 mm	83/27 mm	0613 631 04	1
1 x 5.5 mm	125 mm	96/31 mm	0613 631 055	1
1.2 x 6.5 mm	150 mm	106/35 mm	0613 631 065	1
1.2 x 8 mm	175 mm	114/38 mm	0613 631 08	1
1.6 x 8 mm	200 mm	114/38 mm	0613 631 082	1
1.6 x 10 mm	200 mm	114/38 mm	0613 631 10	1



VDE screwdriver, flat slotted, ultra slim

Effortless access to deep-seated screw and spring elements.

- Insulation with reduction of blade diameter in critical working area
- Prevents fraying of insulation
- Screw symbol on end of handle
- Tip: DIN ISO 2380-1-A
- Blade: Burnished



Art. No.	0613 631 25	0613 631 35	0613 631 40	0613 631 55
Thickness of cutting edge x width of cutting edge	0.4 x 2.5 mm	0.6 x 3.5 mm	0.8 x 4 mm	1 x 5.5 mm
Blade length (A)	80 mm	100 mm	100 mm	125 mm
Handle length/handle width (B / C)	83/27 mm	83/27 mm	83/27 mm	96/31 mm
P. Qty./unit	1	1	1	1



VDE screwdriver PH recessed head

For working on live parts up to 1000 V (AC) and up to 1500 V (DC)

- Blade: burnished, insulated
- Tip: In accordance with DIN ISO 8764-1-PH
- Individually tested in water bath with 10 kV test voltage
- Marked with year of manufacture
- Stricter cold impact test



Tip size	Blade length (A)	Handle length/handle width (B / C)	Art. No.	P. Qty./unit
PH0	80 mm	83/27 mm	0613 632 0	1
PH1	80 mm	96/31 mm	0613 632 1	1
PH2	100 mm	106/35 mm	0613 632 2	1
PH3	150 mm	114/38 mm	0613 632 3	1
PH4	200 mm	114/38 mm	0613 632 4	1



VDE screwdriver for hexagon head

For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC)

- Blade: burnished, insulated
- Tip: DIN 475/2
- Standard: DIN 7445, IEC 60900:2012



Width across flats	Handle length/handle width	Length	Art. No.	P. Qty./unit
5.5 mm	96/31 mm	221 mm	0613 636 055	1
6 mm	96/31 mm	221 mm	0613 636 06	1
7 mm	106/35 mm	231 mm	0613 636 07	1
8 mm	106/35 mm	231 mm	0613 636 08	1
9 mm	106/35 mm	231 mm	0613 636 09	1
10 mm	106/35 mm	231 mm	0613 636 10	1
12 mm	114/38 mm	239 mm	0613 636 12	1
13 mm	114/38 mm	239 mm	0613 636 13	1

VDE screwdriver, hexagon socket

For working on live parts up to 1000 V (AC) and up to 1500 V (DC)

- Blade: Burnished, insulated
- Output: DIN 7439



Tip size	Blade length	Handle length/handle width	Art. No.	P. Qty./unit
2.5 mm	80 mm	83/27 mm	0613 635 025	1
3 mm	80 mm	83/27 mm	0613 635 03	1
4 mm	80 mm	96/31 mm	0613 635 04	1
5 mm	80 mm	106/35 mm	0613 635 05	1
6 mm	100 mm	106/35 mm	0613 635 06	1
8 mm	100 mm	114/38 mm	0613 635 08	1



VDE screwdriver, PH recessed head, extra slim

Effortless access to deep-seated screw and spring elements.

- Insulation with reduction of blade diameter in critical working area
- Prevents fraying of insulation
- Screw symbol on end of handle
- Tip: DIN ISO 8764-I-PH
- Blade: Burnished




Art. No.	0613 632 10	0613 632 20
Tip size	PH1	PH2
Blade length (A)	80 mm	100 mm
Handle length/handle width (B / C)	96/31 mm	106/35 mm
P. Qty./unit	1	1



VDE screwdriver, TX

For working on live parts up to 1000 volts (AC) and up to 1500 volts (DC)

- Blade: burnished, insulated
- Output: TX socket, Black Point
- Screw symbol and handle size on end of handle for quick identification
- Standard: IEC 60900:2012



Tip size	Blade length	Handle width (Griffb.)	Handle length	Length	Art. No.	P. Qty./unit
TX8	100 mm	27 mm	83 mm	183 mm	0613 623 08	1
TX9	100 mm	27 mm	83 mmw	183 mm	0613 623 09	1
TX10	100 mm	27 mm	83 mm	183 mm	0613 623 10	1
TX15	100 mm	31 mm	96 mm	196 mm	0613 623 15	1
TX20	125 mm	31 mm	96 mm	121 mm	0613 623 20	1
TX25	125 mm	35 mm	106 mm	231 mm	0613 623 25	1
TX30	150 mm	35 mm	106 mm	256 mm	0613 623 30	1



⚡ 1000 V



VDE screwdriver PZ recessed head ultra-slim

Effortless access to deep-seated screw and spring elements.

- Insulation with reduction of blade diameter in critical working area
- Prevents fraying of insulation
- Screw symbol printed on handle end for quick identification
- Ultra-slim design



Application area

Switch cabinets and distributor boxes, circuit breakers, terminal blocks and relays.

Proof of Performance

Individually tested in accordance with IEC 60900:2004.

Tip size	Blade length (A)	Handle length/ handle width (B / C)	Art. No.	P. Qty./unit
PZ1	80 mm	96/31 mm	0613 633 10	1
PZ2	100 mm	106/35 mm	0613 633 20	1



⚡ 1000 V



VDE screwdriver PZ recessed head

For working on live parts up to 1000 V (AC) and up to 1500 V (DC)

- Blade: burnished, insulated
- Tip type: ISO 8764-PZ
- Standard: DIN 7438, IEC 60900:2012



Tip size	Blade length (A)	Handle length/ handle width (B / C)	Art. No.	P. Qty./unit
PZ0	80 mm	83/27 mm	0613 633 0	1
PZ1	80 mm	96/31 mm	0613 633 1	1
PZ2	100 mm	106/35 mm	0613 633 2	1
PZ3	150 mm	114/38 mm	0613 633 3	1



⚡ 1000 V



WRENCHES



△ 1000 V



VDE 3/8 inch ratchet

Insulated reversible ratchet for working around live parts

- Quick release thanks to push button with safety lock
- Reversing lever for clockwise and anti-clockwise rotation

Length: 200 mm

Art. no. 0715 003 038

P. Qty./unit 1



3/8 inch VDE socket wrench

Metric, hexagon, long

Insulated socket wrench insert for working around live parts



Drive	3/8 inch
Drive type	Internal square
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Length (L1)	80.5 mm
Sleeve depth (L3)	17 mm
Socket wrench external diameter (D1)	22.5 mm

Width across flats	Art. no.	P. Qty./unit
8 mm	0715 003 08	1
10 mm	0715 003 10	1
12 mm	0715 003 12	1

VDE 3/8 inch extension

Insulated extension for working around live parts

- Quick-change chuck for permanent locking and fast changing of the socket wrench inserts

Length: 167 mm

Art. no. 0715 003 01

P. Qty./unit 1



3/8 inch VDE socket wrench

Metric, hexagon, short

Insulated socket wrench insert for working around live parts



Drive	3/8 inch
Drive type	Internal square
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Sleeve depth (L3)	17 mm
Socket wrench external diameter (D1)	21.9 mm

Width across flats	Art. no.	P. Qty./unit
8 mm	0715 003 108	1
10 mm	0715 003 110	1
12 mm	0715 003 112	1
13 mm	0715 003 113	1
14 mm	0715 003 114	1
17 mm	0715 003 117	1

VDE box-end wrench

Insulated box-end wrench for working around live parts



Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 7447

Width across flats (A)	External diameter of ring (B)	Length (L1)	Art. no.	P. Qty./unit
8 mm	19.7 mm	164 mm	0715 002 308	1
10 mm	21 mm	174 mm	0715 002 310	1
12 mm	21.5 mm	184 mm	0715 002 312	1
13 mm	23.5 mm	205 mm	0715 002 313	1
14 mm	23.5 mm	205 mm	0715 002 314	1
17 mm	26.5 mm	221 mm	0715 002 317	1

VDE 1/2 inch reversible ratchet

Insulated reversible ratchet for working around live parts

- Quick release thanks to push button with safety lock
- Reversing lever for clockwise and anti-clockwise rotation



Length: 255 mm

Art. no. 0715 005 012

P. Qty./unit 1

VDE 1/2 inch extension

Insulated extension for working around live parts

- Quick-change chuck for permanent locking and fast changing of the socket wrench inserts



Length: 140 mm

Art. no. 0715 005 01

P. Qty./unit 1

Length: 267 mm

Art. no. 0715 005 02

P. Qty./unit 1

VDE 1/2 inch socket wrench Metric, hexagon, long

Insulated socket wrench insert for working around live parts



*15mm size from different supplier

Drive	1/2 inch
Drive type	Internal square
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Length (L1)	94 mm

Width across flats	Art. no.	P. Qty./unit
10 mm	5997 770 843	1
11 mm	5997 770 844	1
12 mm	5997 770 845	1
13 mm	5997 770 846	1
14 mm	5997 770 847	1
15 mm	0715 005 215	1
16 mm	5997 770 848	1
17 mm	5997 770 849	1
18 mm	5997 770 850	1
19 mm	5997 770 851	1

VDE 1/2 inch socket wrench Metric, hexagon, short

Insulated socket wrench insert for working around live parts



Drive	1/2 inch
Drive type	Internal square
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Length (L1)	54.5 mm

Width across flats	Art. no.	P. Qty./unit
10 mm	5997 775 994	1
11 mm	5997 775 995	1
12 mm	5997 775 996	1
13 mm	5997 775 997	1
14 mm	5997 775 998	1
15 mm	5997 775 999	1
16 mm	5997 776 060	1
17 mm	5997 776 061	1
18 mm	5997 776 062	1
19 mm	5997 776 063	1

3/8 inch VDE socket wrench Hexagon socket

Insulated socket wrench insert for working around live parts



Drive	3/8 inch
Drive type	Internal square
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Length (L1)	63 mm
Blade length (L2)	16 mm
Sleeve depth (L3)	17 mm
Socket wrench external diameter (D1)	21.9 mm

Width across flats	Art. no.	P. Qty./unit
4 mm	0715 004 04	1
5 mm	0715 004 05	1
6 mm	0715 004 06	1
8 mm	0715 004 08	1
10 mm	0715 004 10	1

VDE 1/2 inch socket wrench Hexagon socket

Insulated socket wrench insert for working around live parts



Drive	1/2 inch
Drive type	Internal square
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Length (L1)	75 mm

Width across flats	Art. no.	P. Qty./unit
4 mm	0715 005 304	1
5 mm	0715 005 305	1
6 mm	0715 005 306	1
8 mm	0715 005 308	1
10 mm	0715 005 310	1

3/8 inch VDE socket wrench TX short

Insulated socket wrench insert for working around live parts



Drive	3/8 inch
Drive type	Internal square
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Length (L1)	60 mm
Blade length (L2)	16 mm
Sleeve depth (L3)	17 mm
Socket wrench external diameter (D1)	21.9 mm

Tip size	Art. no.	P. Qty./unit
TX10	0715 003 410	1
TX15	0715 003 415	1
TX20	0715 003 420	1
TX25	0715 003 425	1
TX27	0715 003 427	1
TX30	0715 003 430	1
TX40	0715 003 440	1

3/8 inch VDE socket wrench TX long

Insulated socket wrench insert for working around live parts



Drive	3/8 inch
Drive type	Internal square
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Length (L1)	122 mm
Blade length (L2)	16 mm
Sleeve depth (L3)	17 mm
Socket wrench external diameter (D1)	21.9 mm

Tip size	Art. no.	P. Qty./unit
TX10	0715 003 510	1
TX15	0715 003 515	1
TX20	0715 003 520	1
TX25	0715 003 525	1
TX27	0715 003 527	1
TX30	0715 003 530	1
TX40	0715 003 540	1

Insulated Extra Long Star* Socket 3/8"D TX15

IEC60900 approved, 1000V, for Star* (Torx®) fixings.



Torx Size	Art. no.	P. Qty./unit
TX15	5997 770 814	1
TX25	5997 770 815	1
TX30	5997 770 816	1
TX40	5997 770 817	1

VDE Insulated Torque Wrench 3/8"D

A fully insulated click type torque wrench, manufactured to IEC60900 standards for 1000vAC / 1500vDC live working, ideal for use on hybrid and electric vehicles. It features an easy to read scale, has a range of 6-30Nm, and is adjusted by a pull-out collar at the base of the handle in 0.1Nm increments.



Size	Art. no.	P. Qty./unit
5 - 25Nm	5997 603 955	1
6 - 30Nm	5997 770 827	1
10 - 60Nm	5997 770 822	1
20 - 100Nm	5997 770 820	1

Insulated Locking Extension Bar 1/2"D

A 125mm insulated 1/2"D extension bar featuring a socket locking mechanism, with a fully insulated pull-back quick release collar, designed to protect up to 1000V for use on hybrid and electric vehicles. VDE certified.




Size	Art. no.	P. Qty./unit
125mm	5997 770 818	1
250mm	5997 770 819	1

VDE 3/8 inch T-handle

Insulated T-handle for working around live parts

- Quick-change chuck for permanent locking and fast changing of the socket wrench inserts

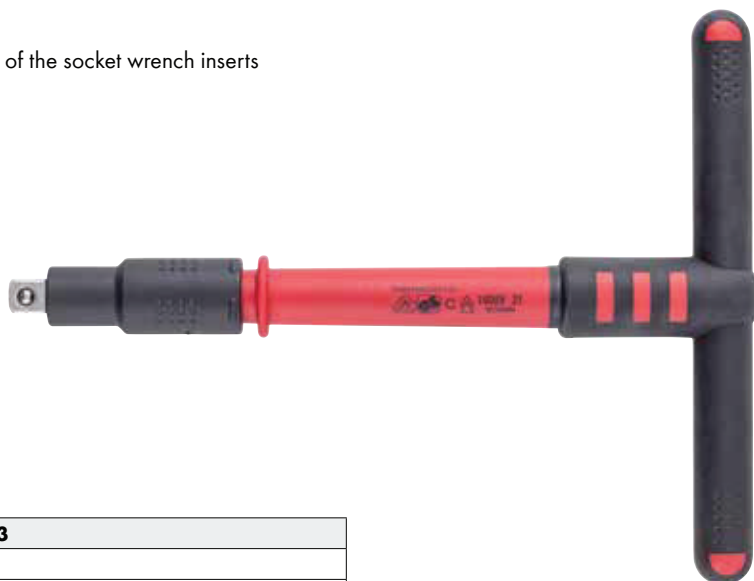

Art. no.	0715 003 03
Tip size	3/8 inch
Material of grip handle	2-component plastic
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3120 DIN 3124
Length (L1)	210 mm
Handle width (L2)	160 mm
Socket wrench external diameter (D1)	17 mm
P. Qty./unit	1

VDE 1/2 inch T-handle

Insulated T-handle for working around live parts

- Quick-change chuck for permanent locking and fast changing of the socket wrench inserts



Art. no.	0715 005 03
Tip size	1/2 inch
Material of grip handle	2-component plastic
Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 3124 DIN 3120
Length (L1)	209 mm
Handle width (L2)	160 mm
Socket wrench external diameter (D1)	20 mm
P. Qty./unit	1

VDE single open-end wrench Metric straight design

Insulated single open-end wrench for working around live parts



Surface	VDE insulated
Material	Chrome-vanadium steel
Standards	EN 60900 DIN 7446

Width across flats	External dimension of wrench head (B)	Handle diameter (C)	Length (L1)	Handle length (L2)	Art. no.	P. Qty./unit
8 mm	23 mm	16.3 mm	104 mm	65 mm	0715 002 408	1
10 mm	25 mm	17.2 mm	114 mm	72 mm	0715 002 410	1
11 mm	29.5 mm	19.9 mm	124 mm	73 mm	0715 002 411	1
12 mm	29.5 mm	19.9 mm	124 mm	75 mm	0715 002 412	1
13 mm	34 mm	23 mm	154 mm	97 mm	0715 002 413	1
14 mm	34 mm	23 mm	154 mm	97 mm	0715 002 414	1
15 mm	42 mm	25.4 mm	171 mm	110 mm	0715 002 415	1
16 mm	42 mm	25.4 mm	171 mm	110 mm	0715 002 416	1
17 mm	42 mm	25.4 mm	171 mm	110 mm	0715 002 417	1
18 mm	46.6 mm	27.3 mm	182 mm	115 mm	0715 002 418	1
19 mm	46.6 mm	27.3 mm	182 mm	115 mm	0715 002 419	1
21 mm	52 mm	29 mm	202 mm	125 mm	0715 002 421	1
22 mm	52 mm	29 mm	202 mm	125 mm	0715 002 422	1
24 mm	57 mm	32 mm	237 mm	140 mm	0715 002 424	1

Insulated Open Ended Spanner Set 7pc

Insulated open ended spanner set, for hybrid and electric vehicle servicing and maintenance, in a range of useful sizes from 8mm to 19mm, for live working up to 1000V AC/ 1500V DC. The spanners are both GS and VDE certificated and manufactured according to the IEC60900 standard for safe use in a high voltage environment. The sizes are clearly marked on the size for easy identification and are presented in a fitted carry case for safe storage.



Art. no. 5997 770 837
P. Qty./unit 1

Cable End Shrouds, 3pcs

Push on shrouds for un-insulated cable ends - 1000V insulated.



Art. no. 5997 770 879

P. Qty./unit 1

Cable End Shroud with Grip Collar

Part of the Laser range of safety equipment for Hybrid vehicles.



Size	Art. no.	P. Qty./unit
15mm	5997 770 828	1
25mm	5997 770 829	1
35mm	5997 770 830	1

Terminal/Cable End Insulated Covers 10pc

Terminal/cable end insulated covers designed to slide over HV connectors and cable ends to help protect against shock.



Art. no. 5997 770 831

P. Qty./unit 1

Insulated Cable Knife

Insulated cable knife, ideal for stripping standard cables. VDE certified.



Art. no. 5997 770 880

P. Qty./unit 1

MECHANICAL TOOL TROLLEY






**SYSTEM ASSORTMENT
4.4.1, PLIERS VDE**
6pcs

Art. no. 0965 905 607
P.Qty./unit 1



**SYSTEM ASSORTMENT
2.4.1, SOCKET WRENCH 3/8
INCH HEXAGON**

6pcs
Art. no. 0965 905 428
P.Qty./unit 1

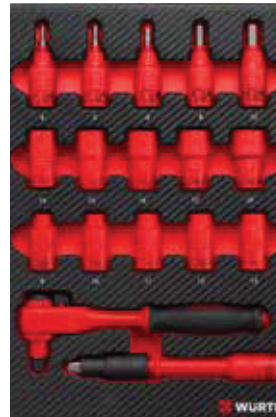

**SYSTEM ASSORTMENT
4.4.1, SOCKET WRENCH 3/8
INCH**

17pcs
Art. no. 0965 905 427
P.Qty./unit 1



**SYSTEM ASSORTMENT 2.4.1,
WRENCH 3/8 INCH TX SHORT**

6pcs
Art. no. 0965 905 424
P.Qty./unit 1



**SYSTEM ASSORTMENT
4.4.1, SINGLE OPEN-END
WRENCH VDE**
6pcs

Art. no. 0965 905 426
P.Qty./unit 1




**SYSTEM WORKSHOP TROLLEY
BASIC 8.8, EMPTY**

Art. no. 0962 647 100
P.Qty./unit 1




**SYSTEM ASSORTMENT 4.4.1,
BOX-END WRENCH VDE**

9pcs
Art. no. 0965 905 422
P.Qty./unit 1

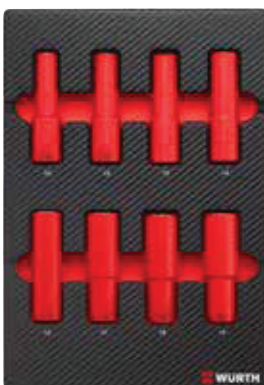


**SYSTEM ASSORTMENT 4.4.1,
SOCKET WRENCH 1/2 INCH
VDE**

8pcs
Art. no. 0965 905 425
P.Qty./unit 1

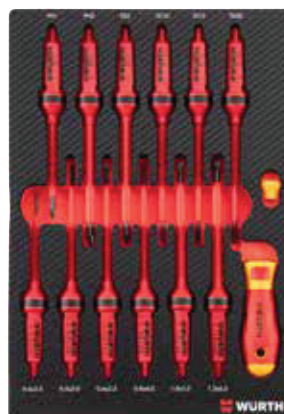

**SYSTEM ASSORTMENT 4.4.1,
SCREWDRIVER VDE**

14pcs
Art. no. 0965 905 415
P.Qty./unit 1

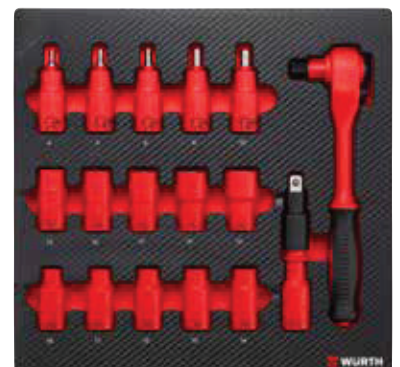

**SYSTEM ASSORTMENT 6.4.1,
SOCKET WRENCH 1/2 INCH**

17pcs
Art. no. 0965 905 421
P.Qty./unit 1

System assortment 6.4.1, pliers VDE 6 pieces

ORSY

Width x height x depth:

345 x 38 x 335 mm

Art. no. 0965 905 413

P. Qty./unit 1



Contents for art. no.	
0965 905 413	1 x VDE snipe nose pliers, angled; 1 x VDE electrical installation pliers IEC 60900; VDE snipe nose pliers DIN ISO 5745, IEC 60900; 1 x VDE snipe nose pliers DIN ISO 5745, IEC 60900; 1 x VDE snipe nose pliers DIN ISO 5745, IEC 60900; 1 x VDE cable cutters with single blade; 1 x VDE cable shears with dual blade; 1 x System insert screwdriver set 6.4.1 6 pcs

System assortment 2.4.1, precision mechanic's screwdrivers VDE 7 pieces


ORSY

Width x height x depth:

115 x 38 x 335 mm

Art. no. 0965 905 414

P. Qty./unit 1

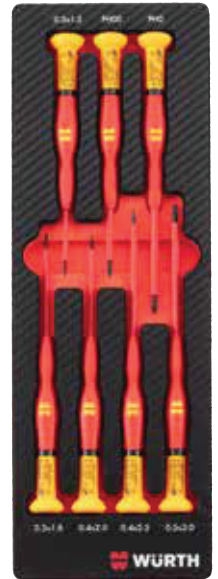

Contents for art. no.	
0965 905 414	VDE precision screwdriver, flat slotted: 1 x Slot 3 mm, 1 x Slot 2.5 mm, 1 x Slot 2 mm, 1 x Slot 1.8 mm; VDE precision screwdriver, PH recessed head: 1 x PH0, 1 x PH00, 1 x Slot 1.5 mm; 1 x System insert screwdriver set precision 2.4.1 7 pcs

System assortment 4.4.1, screwdriver VDE 14 pieces


ORSY

Width x height x depth:

231 x 38 x 335 mm

Art. no. 0965 905 415

P. Qty./unit 1

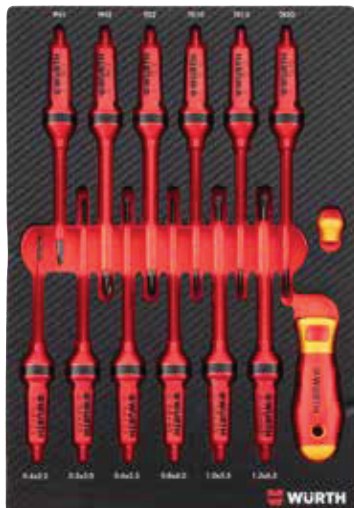

Contents for art. no.	
0965 905 415	Replacement blade VDE: 1 x Slot 2.5 mm, 1 x Slot 3.0 mm, 1 x Slot 3.5 mm, 1 x Slot 4.0 mm, 1 x Slot 5.5 mm, 1 x Slot 6.5 mm, 1 x PH1, 1 x PH2, 1 x PZ2, 1 x TX10, 1 x TX15, 1 x TX20; 1 x Handle VDE; 1 x System insert screwdriver set VDE 14 pcs

System assortment 4.4.1, screwdrivers VDE TX 6 pieces


ORSY

Width x height x depth:

231 x 38 x 335 mm

Art. no. 0965 905 416

P. Qty./unit 1

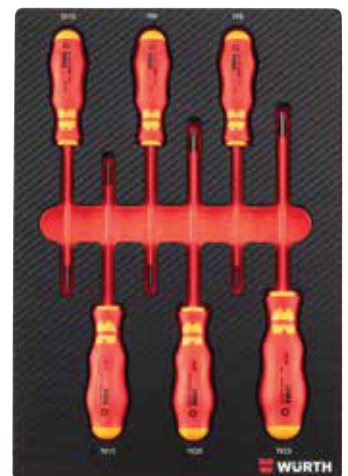

Contents for art. no.	
0965 905 416	VDE screwdriver, TX: 1 x TX8, 1 x TX9, 1 x TX10, 1 x TX15, 1 x TX20, 1 x TX25; 1 x System insert screwdriver set VDE TX 4.4.1 6 pcs

System assortment 4.4.1, screw-drivers VDE hexagon head 8 pieces


ORSY

Width x height x depth:

231 x 38 x 335 mm

Art. no. 0965 905 418

P. Qty./unit 1

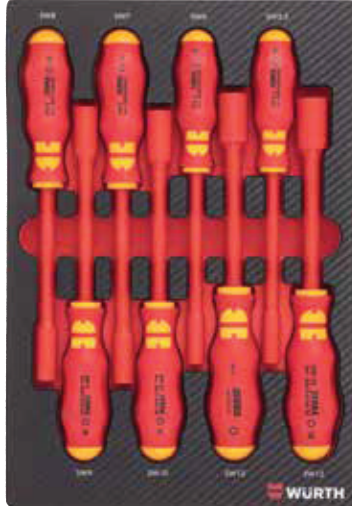

Contents for art. no.	
0965 905 418	VDE screwdriver for hexagon head: 1 x 5.5 mm, 1 x 6 mm, 1 x 7 mm, 1 x 8 mm, 1 x 9 mm, 1 x 10 mm, 1 x 12 mm, 1 x 13 mm; 1 x Screw-driver set VDE hexagon 4.4.1 8 pieces

System assortment 6.4.1, socket wrench 1/2 inch 17 pieces

ORSY

Width x height x depth:

346 x 38 x 335 mm

Art. no. 0965 905 421

P. Qty./unit 1



Contents for art. no.	
0965 905 421	1 x VDE 1/2 inch reversible ratchet; 1 x VDE 1/2 inch extension; VDE 1/2 inch socket wrench Metric, hexagon, short: 1 x 10 mm, 1 x 11 mm, 1 x 12 mm, 1 x 13 mm, 1 x 14 mm, 1 x 15 mm, 1 x 16 mm, 1 x 17 mm, 1 x 19 mm, 1 x 21 mm; VDE 1/2 inch socket wrench Hexagon socket: 1 x 4 mm, 1 x 5 mm, 1 x 6 mm, 1 x 8 mm, 1 x 10 mm

System assortment 8.4.1, socket wrenches 3/8 inch VDE 24 pieces

ORSY

Width x height x depth:

462 x 38 x 335 mm

Art. no. 0965 905 417

P. Qty./unit 1



Contents for art. no.	
0965 905 417	3 x Insulating caps 3.5 kV; 2 x Electrical insulating tape; VDE box-end wrench: 1 x 17 mm, 1 x 14 mm, 1 x 13 mm, 1 x 12 mm, 1 x 10 mm, 1 x 8 mm; 1 x VDE 3/8 inch extension; 1 x VDE 3/8 inch ratchet; 3/8 inch VDE socket wrench Metric, hexagon, long: 1 x 8 mm, 1 x 10 mm; 1 x 3/8 inch VDE socket wrench Metric, hexagon, long 12 mm; 3/8 inch VDE socket wrench Metric, hexagon, short: 1 x 8 mm, 1 x 10 mm, 1 x 12 mm, 1 x 13 mm, 1 x 14 mm, 1 x 17 mm; 1 x 3/8 inch VDE socket wrench Hexagon socket 4 mm; 1 x System insert socket wrench set VDE 8.4.1 24 pcs

System assortment 4.4.1, VDE SL/PH screwdrivers Five pieces


ORSY

Width x height x depth:

231 x 38 x 335 mm

Art. no. 0965 905 419

P. Qty./unit 1

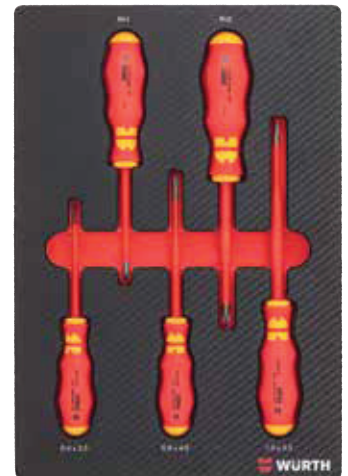

Contents for art. no.	
0965 905 419	VDE screwdriver, flat slotted, ultra slim : 1 x 0.4 x 2.5 mm, 1 x 0.8 x 4 mm, 1 x 1 x 5.5 mm; VDE screwdriver, PH recessed head, extra slim: 1 x PH1, 1 x PH2

**System assortment 2.4.1,
socket wrench 3/8 inch TX short
6 pieces**



Width x height x depth:
115 x 38 x 335 mm

Art. no. 0965 905 424
P. Qty./unit 1




Contents for art. no.	
0965 905 424	3/8 inch VDE socket wrench TX short: 1 x , 1 x , 1 x , 1 x , 1 x , 1 x

**System assortment 4.4.1,
socket wrench 1/2 inch VDE
8 pieces**



Width x height x depth:
231 x 38 x 335 mm

Art. no. 0965 905 425
P. Qty./unit 1

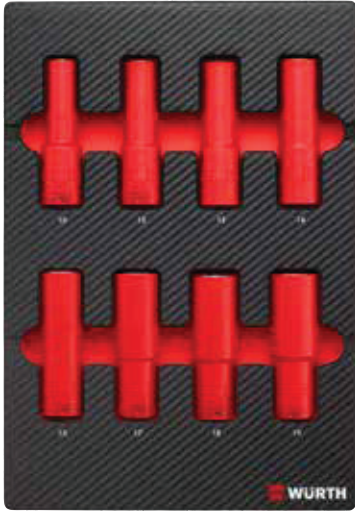

Contents for art. no.	
0965 905 425	VDE 1/2 inch socket wrench Metric, hexagon, long: 1 x 10 mm, 1 x 12 mm, 1 x 13 mm, 1 x 14 mm, 1 x 15 mm, 1 x 17 mm, 1 x 18 mm, 1 x 19 mm

**System assortment 4.4.1,
box-end wrench VDE
9 pieces**



Width x height x depth:
346 x 38 x 335 mm

Art. no. 0965 905 422
P. Qty./unit 1



Contents for art. no.	
0965 905 422	VDE box-end wrench: 1 x 8 mm, 1 x 10 mm, 1 x 12 mm, 1 x 13 mm, 1 x 14 mm, 1 x 15 mm, 1 x 17 mm, 1 x 18 mm, 1 x 19 mm

**System assortment 2.4.1,
socket wrench 3/8 inch TX long
6 pieces**



Width x height x depth:
115 x 38 x 335 mm

Art. no. 0965 905 423
P. Qty./unit 1



**System assortment 4.4.1,
single open-end wrench VDE
9 pieces**



Width x height x depth:
346 x 38 x 335 mm
Art. no. 0965 905 426
P. Qty./unit 1



Contents for art. no.	
0965 905 426	VDE single open-end wrench Metric straight design: 1 x 8 mm, 1 x 10 mm, 1 x 12 mm, 1 x 13 mm, 1 x 14 mm, 1 x 15 mm, 1 x 17 mm, 1 x 18 mm, 1 x 19 mm

**System assortment 4.4.1,
socket wrench 3/8 inch
17 pieces**



Width x height x depth:
231 x 38 x 335 mm
Art. no. 0965 905 427
P. Qty./unit 1



Contents for art. no.	
0965 905 427	1 x VDE 3/8 inch ratchet; 1 x VDE 3/8 inch extension; 3/8 inch VDE socket wrench Metric, hexagon, short: 1 x 8 mm, 1 x 10 mm, 1 x 11 mm, 1 x 12 mm, 1 x 13 mm, 1 x 14 mm, 1 x 15 mm, 1 x 16 mm, 1 x 17 mm, 1 x 19 mm; 3/8 inch VDE socket wrench Hexagon socket: 1 x 4 mm, 1 x 5 mm, 1 x 6 mm, 1 x 8 mm, 1 x 10 mm

**System assortment 2.4.1,
socket wrench 3/8 inch hexagon
6 pieces**



Width x height x depth:
115 x 38 x 335 mm
Art. no. 0965 905 428
P. Qty./unit 1



Contents for art. no.	
0965 905 428	3/8 inch VDE socket wrench Metric, hexagon, long: 1 x 8 mm, 1 x 10 mm, 1 x 12 mm; 1 x Socket wrench VDE 1/2 inch, others 13 mm; 1 x Individual Czech Republic; 1 x Socket wrench VDE 1/2 inch, others

**System assortment 4.4.1,
pliers VDE
4 pieces**



Width x height x depth:
231 x 38 x 335 mm
Art. no. 0965 905 607
P. Qty./unit 1



Contents for art. no.	
0965 905 607	1 x VDE wire stripping pliers, IEC 60900; 1 x VDE side cutters DIN ISO 5749 IEC 60900; 1 x VDE combination pliers DIN ISO 5746 IEC 60900; 1 x VDE snipe nose pliers DIN ISO 5745, IEC 60900; 1 x System insert pliers set VDE 4.4., 14 pieces

WORKSHOP TROLLEY EQUIPPED 224pcs

Features:

- 7 drawer roller cabinet
- Overall size (w/o casters): 776 X 521 X 859mm
- Steel thickness 1.0mm for body and for 0.8mm for drawers; With 16** 45mm ball bearing slides (loading weight:45 kg per drawer)
- Rubber corners for impact protection
- Heavy duty transport wheels with brake
- Soft rubber handles for comfortable steering

Number of pieces in assortment/set	1 PCS
Width x depth x height (external dimension)	776 x 521 x 859 mm
Drawer design	7 drawers W 565 x D 415 x H 72 mm
Load capacity	300 kg
Colour	Black red RAL 3007
Colour of drawer	Black
Pullout type	Ball-bearing
Number of rolls	4 PCS



Art. no. 0962 612 300

P. Qty.: 1

Contents for art. no. 0962 612 300		
Designation	Art. no.	Quantity
Metal workshop oiler	0695 555 401	
Wire brush with wooden body Number of rows 4 PCS	0697 4	
Precision feeler gauge Min./max. blade thickness 0.05-1 mm	0713 51 42	
Locking pliers with straight jaws Length 225 mm; Min./max. clamping width 0-38 mm	0715 09 10	
Adjustable open-end wrench 10 in	0715 221 10	
Allen key, hexagon socket with pin short version		
Magnetic lifter with plastic handle	0715 35 35	
SIMPLEX soft-face hammer with rubber-cellulose acetate insert combination	0715 72 10	
Machinist's hammer German design in accordance with DIN 1041 Hammer weight 500 g	0715 731 50	
System insert 2.4.1, empty compartment	0955 905 952	
HEAVY DUTY WORKSHOP TROLLEY	0962 699 235	
System assortment 8.4.1, socket wrench 1/2 inch 23 pieces	0965 905 202	
System assortment 4.4.1, TX socket wrench 1/2 inch 12 pieces	0965 905 207	
System assortment 4.4.1 combination wrenches, metric, 15° angled ring 17 pieces	0965 905 401	
System assortment 8.4.1, combination wrench 10 pieces	0965 905 402	
System assortment 8.4.1 double box-end wrenches, metric, deep offset 12 pieces	0965 905 405	
System assortment 4.4.1, screwdriver 8 pieces	0965 905 501	
System assortment 4.4.1, pliers 4 pieces	0965 905 600	
System assortment 4.4.1, circlip pliers 4 pieces	0965 905 602	
System assortment 4.4.1, drift punch and striking tool 14 pieces	0965 905 701	
System assortment 8.4.1, files and scrapers 9 pieces	0965 905 802	
System assortment 8.4.1, socket wrench 3/8 + 1/4 inch 91 pieces	0965 905 903	

Metal workshop oiler

- Ergonomic zinc diecast oil container
- Virtually complete draining due to moving suction tube
 - Double-action brass pump with ball valve
 - Pump unit enables metered droplet outlet

The usage instructions are recommendations based on the tests we have conducted and our experience; carry out your own tests before each application. Due to the large number of applications as well as storage and processing conditions, we do not assume any liability for a specific application result. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by the provision of this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting deliberately. We guarantee the consistent quality of our products. We reserve the right to make technical changes and further develop products.



Art.-no. 0695555401
P. Qty./unit 1

Adjustable open-end wrench

- Clockwise model with metric scale for rapid and reliable identification of width across flats
- Standard: DIN 3117/ISO 6787
 - Surface: polished head



Art.-no.071522110
P. Qty./unit 1

Precision feeler gauge

- For measuring slots and gaps, and for checking play on slide guides, bearings, pistons etc.
- Conical gauge blades with easily readable dimensions
 - Gauge blades stored in a high-quality plastic sheath
 - Clamping screw for securing the gauge blades
 - Essential aid where conventional measuring is difficult or impossible




Art.-no.071351 42
P. Qty./unit 1

Wire brush with wooden body

Art.-no. 06974
P. Qty./unit 1

Wire diameter	0.35 mm
Length of bristles (L3)	25 mm
Length (L1)	290 mm
Length of head (L 2)	135 mm

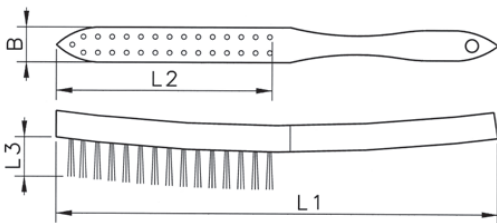

Locking pliers with straight jaws

For clamping sheets and plates

- Smooth-action release lever with spring mechanism
- Convenient and effortless one-handed operation - pulling instead of pressing
- Made from high-strength rolled, partly forged and oil-hardened steel



Art.-no. 0695555401

P. Qty./unit 1

Allen key, hexagon socket with pin short version

- Bright nickel plated
- DIN 6912



Art.-no.071531110

P. Qty./unit 1

Machinist's hammer German design in accordance with DIN 1041

Double scutch ash handle

Optimum impact hardness and no splintering

Electro-inductively hardened

Good handling and long service life

Double-curved, varnished ash handle

Handle secured by ring wedge sealed with synthetic resin



Art.-no. 071573150

P. Qty./unit 1

Magnetic lifter with plastic handle

Flexible shaft for versatile applications



Art.-no.071535 35

P. Qty./unit 1

SIMPLEX soft-face hammer with rubber-cellulose acetate insert combination

Mallet with ergonomic wooden handle, malleable cast iron housing and interchangeable hammer heads
High degree of flexibility

Versatile due to the two different striking surfaces
Customised equipping is possible due to a wide range of interchangeable hammer heads
Ready for immediate use due to a pre-fitted hammer head combination of hard, oil- and grease-resistant cellulose (red) and soft, low-wear rubber (black)
Highest quality from Germany

Robust and durable due to the malleable cast iron housing with integrated handle protection sleeve to increase breaking resistance
Optimal handling due to the high-quality, vibration-dampened, ergonomically shaped wooden handle with double-layered varnish in the grip area
Long-term use is possible as the handle and all hammer heads are available as replacement parts and can be easily interchanged



Art.-no. 071572 10

P. Qty./unit 1

System assortment 8.4.1, socket

Compatible with all products of the ORSY system world

Uniform grid dimensions

Attractive carbon finish

Insert made from high-quality plastic in attractive carbon finish for improved robustness, stability and easy cleaning

Find the correct tools quickly and easily

Tool sizes marked on insert.



Number of pieces in assortment/set	23 PCS
Size foam section	8.4.1
Width x height x depth	462 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905202

P. Qty./unit 1

System assortment 4.4.1, TX socket wrench 1/2 inch 12 pieces



Number of pieces in assortment/set	17 PCS
Size foam section	4.4.1
Width x height x depth	231 x 38 x 335 mm
Decor	Carbon appearance

Art. no. 0965 905 401

P. Qty./unit 1

System insert 2.4.1, empty compartment



Size foam section	4.2.1
Width x height x depth	115 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0955905952

P. Qty./unit 1


System assortment 8.4.1, combination wrench 10 pieces



Number of pieces in assortment/set	10 PCS
Size foam section	8.4.1
Width x height x depth	462 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905402
P. Qty./unit 1


System assortment 4.4.1, screwdriver 8 pieces



Number of pieces in assortment/set	8 PCS
Size foam section	4.4.1
Width x height x depth	231 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905501
P. Qty./unit 1

System assortment 8.4.1 double box-end wrenches, metric, deep offset 12 pieces

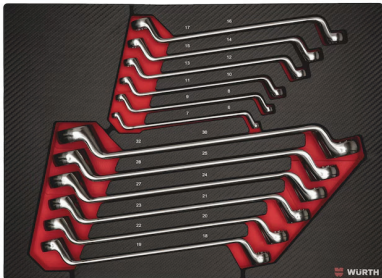

Number of pieces in assortment/set	12 PCS
Size foam section	8.4.1
Width x height x depth	462 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905405
P. Qty./unit 1


System assortment 4.4.1, pliers 4 pieces



Number of pieces in assortment/set	4 PCS
Size foam section	4.4.1
Width x height x depth	231 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905600
P. Qty./unit 1

System assortment 4.4.1, circlip pliers
4 pieces

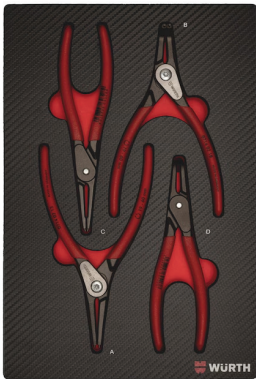

Number of pieces in assortment/set	4 PCS
Size foam section	4.4.1
Width x height x depth	231 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905602
P. Qty./unit 1


System assortment 8.4.1, files and scrapers
9 pieces



Number of pieces in assortment/set	9 PCS
Size foam section	8.4.1
Width x height x depth	462 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905802
P. Qty./unit 1


System assortment 4.4.1, drift punch and striking tool
14 pieces

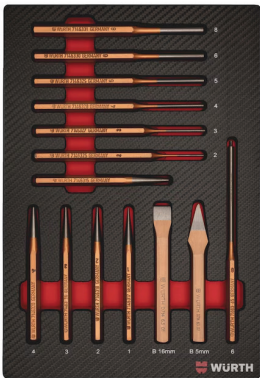

Number of pieces in assortment/set	14 PCS
Size foam section	4.4.1
Width x height x depth	231 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905701
P. Qty./unit 1

System assortment 8.4.1, socket wrench
3/8 + 1/4 inch 91 pieces

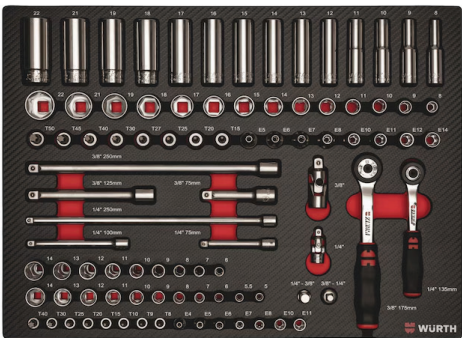

Number of pieces in assortment/set	91 PCS
Size foam section	8.4.1
Width x height x depth	462 x 38 x 335 mm
Decor	Carbon appearance

Art.-no. 0965905903
P. Qty./unit 1

TOOL ASSORTMENTS



Tool case

32 pieces in system case 8.4.2. Especially suitable for electric and hybrid vehicles.

Contents for Art. No.

5964 502 002	2 x Electrical insulating tape 0,15 x 15 x 10 mm; 1 x Two-pin voltage tester Multi-Tester Pro II LED; 1 x Safety glasses CEPHEUS ; 1 x Voltage protective glove Gr. 10; 3 x Insulating caps 3.5 kV; 1 x VDE snipe nose pliers DIN ISO 5745, IEC 60900 200 mm; 1 x VDE combination pliers DIN ISO 5746 IEC 60900 180 mm; VDE screwdriver PH recessed head: 1 x 1, 1 x 2; VDE screwdriver Flat slotted: 1 x 0,6 x 3,5, 1 x 1,0 x 5,5; 1 x VDE 3/8 inch ratchet 200 mm; 1 x VDE 3/8 inch extension 150 mm; 3/8-inch VDE socket wrench: 1 x lang 8 mm, 1 x lang 10 mm; 1 x 3/8-inch VDE socket wrench lang 12 mm; 1 x 3/8 inch VDE socket wrench Hexagon socket 4 mm; 3/8 inch VDE socket wrench Hexagon: 1 x 8 mm, 1 x 10 mm, 1 x 12 mm, 1 x 13 mm, 1 x 14 mm, 1 x 17 mm; Box wrench VDE: 1 x 8 mm, 1 x 10 mm, 1 x 12 mm, 1 x 13 mm, 1 x 14 mm, 1 x 17 mm;
---------------------	--

Length x width x height: 500 x 380 x 140mm

Art. No. 5964 502 002

P. Qty./unit 1

ORSY



Tool case

16 pieces in system case 8.4.1. Especially suitable for electric and hybrid vehicles.

- Large selection

Tool case equipped with essential VDE tools and accessories

Contents for Art. No.

5964 502 001	1 x VDE screwdriver Flat slotted 1.0 x 5.5 mm; 1 x VDE screwdriver PH recessed head 2; 1 x VDE snipe nose pliers DIN ISO 5745, IEC 60900 210 mm; 1 x VDE 3/8 inch extension 150 mm; 1 x VDE 3/8 inch ratchet 200 mm; 3/8-inch VDE socket wrench: 1 x 8 mm, 1 x 10 mm, 1 x 12 mm; 1 x Two-pin voltage tester Multi-Tester Pro II LED; 3 x Insulating caps 3.5 kV 8-14 mm; 1 x Safety glasses CEPHEUS ; 1 x Voltage protective glove Size: 10; 2 x Electrical insulating tape 15 mm, 10 mm; 1 x System case 8.4.1
---------------------	---

Length x width x height: 500 x 380 x 87 mm

Art. No. 5964 502 001

P. Qty./unit 1

ORSY



ELECTRICAL SOLDERING GUN 230 V 60 W ASSORTMENT 5 PIECES IN SYSTEM CASE

Ready to use immediately thanks to short heat-up time

Short heat-up time

Ready to solder in five seconds

Soldering points easily visible

Plastic housing with inbuilt illumination of soldering point

Protection of the user

Insulated device in accordance with international standards



Art.-no. 5964071500



INSULATED CABLE CONNECTOR ASSORTMENT 530 PCS IN SYSTEM CASE 4.4.1

For fine and finest stranded copper conductors



Art.-no. 5964055800



TEST EQUIPMENT



Test equipment

Digital clip-on ampere meter

AM 600 AC/DC

Digital clip-on ampere meter with extensive measuring options, effective value measurement (TRMS), auto-range function and LED measuring point illumination for professional use in trade and industry.

- The Würth AM 600, certified for safe use in CAT III 600 V environments, offers those functions that are essential to detecting malfunctions and numerous problems in electrical and electronic systems.
- Properties:
 - Suitable for measuring AC/DC current, AC/DC voltage, resistance, continuity, diodes, frequency and capacity
 - Can be used for AC/DC voltages up to 600 V and AC/DC currents up to 600 A
 - Resistance measurement up to 60 M Ω
 - Min/max key for displaying the maximum or minimum measured value or difference between the two values
 - Toggling between manual range switchover and auto-range
 - Display hold function
 - Automatic switch-off after 15 min
 - Fused inputs to protect the measuring instrument
 - LCD display for 6000 digits
 - Complies with standard EN 61010-2-032



Length x width x height: 210 x 80 x 35 mm

Art. No. 0715 53 715

P. Qty./unit 1

PROFESSIONAL DIGITAL MULTIMETER

Versatile TRMS multimeter, provides the most important functions for daily use in skilled trades, business and industry. For maintenance, installation, service. Robust due to shock-proof cover.

- Measurement of voltage: AC, DC
- Measurement of current: AC, DC, from as little as 10 μ A
- Measurement of resistance, capacitance, temperature
- Audible continuity testing, diode test
- Voltage measurement with low impedance (VLOWZ = 500 k Ω), adjustable
- Non-contact voltage indicator (NCV): Displayed in red for hazardous voltage
- Built-in LED for simplified working in dark environments (illuminates the measuring point)
- Large backlit LCD display for optimum readability
- Resolution of 6,000 digits for high accuracy
- Automatic range selection, AC/DC - detection and shutdown
- Fuses are very easy to change
- Attachment of the device to switch cabinets, metal doors with magnets in the shock protection cover
- Adjustable folding support enables installation at different angles of inclination
- Holder for test tips with 19 mm spacing simplifies measurement at sockets
- Includes: 2 x measuring leads, 2 x test tips, 1 x K thermocouple sensor, 1 x shock-proof cover
- Scope of delivery includes two measuring leads, two probe tips, one K thermocouple sensor and a robust, shock-proof cover



Art.-no. 071558 550961 1

P. Qty./unit 1



Two-pin voltage tester Multi-Tester Pro II LED

Overvoltage category CAT IV (1000 V) — suitable for use in electrical installation and servicing work, and for testing hybrid and electric vehicles and photovoltaic systems

- Test equipment with maximum safety level
- Indication of voltages also possible without battery
- FI/RCD test with two keys
- Enhanced hold in safety socket and CEE socket
- Suitable for narrow test openings

Art. No. 0715 53 165

P. Qty./unit 1

CAT IV 1000V



Two-pin voltage tester Multi-Tester

Pro II LCD

Overvoltage category CAT IV (1000 V) — suitable for use in electrical installation and servicing work, and for testing hybrid and electric vehicles and photovoltaic systems

- Test equipment with maximum safety level (CAT IV 1000 V)
- No presetting, intuitive operation
Automatic testing range selection
- Voltages can also be displayed without battery
Visual and vibratory warning from 35 V AC/DC when operating with batteries
- FI/RCD test using two buttons
Intentional triggering of the FI switch facilitates push-button activation of the load so that the protective conductor can also be measured.
- Screwable 4-mm test probe adapter
 - Enhanced hold in safety socket and CEE socket
 - Suitable for narrow test openings
- Energy-saving
Automatic shut-off device

Art. No. 0715 53 175

P. Qty./unit 1

CAT IV 1000V



Mini digital multimeter

Small meter for measuring direct and alternating current, resistance testing, continuity testing, diode testing and contactless voltage testing.

- The test leads can be fastened to the rear of the device; this protects them from damage and prevents injury from the measuring tips
- Permanently attached test leads, data hold, diode testing, continuity testing, integrated LED pocket torch and automatic range detection
- With robust, splash-proof rubber housing and membrane keyboard

Art. No. 0715 53 370

P. Qty./unit 1



Automotive multimeter mm 50/20

Modern, digital multimeter, specially developed for professional applications in garages.

- Enables measurements that are specifically required in the vehicle environment
In addition to conventional measurements, measurements can also be performed for rotation speed, closing angle and duty cycle.
- Measurements possible up to 20 amperes (caution: only up 50 volts!)
Conventional multimeters measure up to 10 amperes, which is not sufficient for modern vehicles under certain circumstances.
- Scope of delivery
 - Automotive multimeter
 - Measuring cables
 - Crocodile terminals
 - Temperature sensor
 - Calibration certificate
 - On-call bag
 - User handbook

Art. No. 0715 53 440

P. Qty./unit 1



Digital multimeter MM 600 TRMS

Modern, digital multimeter with effective value measurement (TRMS), cable break detector and LED pocket torch for professional use in trade and industry.

- The Würth MM 600, certified for safe use in CAT IV 600 V environments, offers essential functions for the detection of malfunctions and numerous problems in electrical and electronic systems.
- Properties:
 - Suitable for measuring AC/DC current, AC/DC voltage, resistance, continuity and diodes
 - Can be used for AC/DC voltage up to 600 V, and also AC/DC current up to 10 A
 - Resistance measurement up to 20 MΩ
 - Contactless voltage tester (visual and acoustic) for quick detection of cable breakage
 - Display saving (hold function)
 - Automatic shut-off after 15 min
 - Fused inputs for protecting the measuring device
 - LCD display with 2000 digits
 - Conforms to EN Standard 61010-2-033

Art. No. 0715 53 415


P. Qty./unit 1



DC1 digital callipers

Ergonomic digital callipers with calibration certificate and a measuring range of 150 mm

- Long service life and reliable measurements due to reinforced plastic housing, hardened and ground measuring jaw
- Very easy-to-read display, even from wider viewing angles
- Two-button operation, on/off, zero/switching inch/mm
- Flat depth gauge for precise depth measurements
- Easy transfer of measurement results using the locking screw on the top to lock
- Tool-free battery replacement, including R2032 battery
- Automatic shutdown after 20 minutes
- Thread table on the rear of the housing
- Supplied with factory calibration certificate

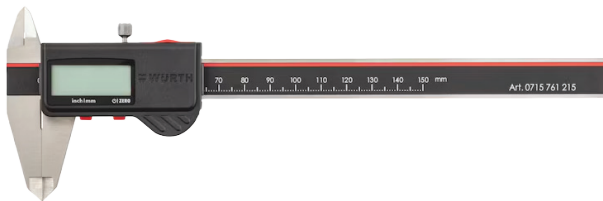

Art.-no. 0715761215961 1

P. Qty./unit 1



Micrometer with reference dimension

- Bracket: forged steel
- Measuring surfaces: carbide, ground and lapped
- From sizes 25-50 mm with reference dimension and scale adjustment wrench
- No dimensional deviation due to micrometer with heat protection
- With ratchet for consistent measuring pressure

Art.-no. 071576101 061 1

P. Qty./unit 1

Spirit level made of light metal

Robust, low-torsion spirit level with rectangular profile, two vials and smooth side surfaces. Available in different lengths.

Excellent readability and long service life

- Acrylic glass vial block with inlaid, corrosion-proof reading rings and fluorescent vial liquid
- High level of UV resistance prevents discolouration of the liquid
- Very smooth surface with red electrostatic powder coating for easy cleaning

High accuracy

- Optimised indicator movement for precise work in fluctuating temperatures, whatever the weather
- Robust light metal profile for precise measurements

Art.-no. 0714644218961 1

P. Qty./unit 1



POWER TOOLS



ABS 18 COMPACT M-CUBE cordless drill driver

Compact, powerful brushless cordless drill driver for medium-duty screwing and drilling work

- Continuous monitoring and premature shutdown of the motor in the event of blockage, overload and overheating
- Efficient, low-maintenance and brushless EC motor with long service life
- Integrated LED lights for direct illumination of the working area
- No signs of fatigue when operating due to lightweight and compact design
- 13 mm metal drill chuck with soldered carbide clamping jaws for maximum service life and low wear. The extra-tough clamping jaws realise a tight grip on the shank of the drill bit
- Electronic signal switch for precise and comfortable working



Art.-no. 5701427000

P. Qty./unit 1

Cordless impact wrench ASS 18 1/2 inch COMPACT M-CUBE

Compact and powerful cordless impact wrench with adjustable power settings and high breakaway torque for versatile application



- Three power levels plus an additional automatic mode that shuts down the motor when the impact mechanism is started, thus minimising the risk of damage to the screw connection
- High rotation speed and impact frequency result in a higher breakaway torque of up to approx. 800 Nm, which also enables jammed wheel nuts to be loosened
- The brushless motor with overload protection is low-maintenance, durable and powerful
- Effortless and user-friendly working due to the compact and lightweight design with rubberised handle
- No recoil or torque effect on the wrist
- Triple LED on the gear head provides optimum illumination of the working area

Art.-no. 5701406000

P. Qty./unit 1

CORDLESS ANGLE GRINDER AWSR 20-115 COMPACT REDSTRIPE

Designed for precision cutting and grinding in metal, stone, and masonry. Its compact, lightweight design ensures better control and reduced fatigue, while the brushless motor technology delivers longer runtime and extended tool life. With three speed settings and built-in safety features, it provides versatile performance without compromising user safety.

FEATURES • The soft start and anti-restart functions reduce kickback and prevent accidental startups, ensuring safer operation. • Overload protection mechanism prevents motor damage under heavy loads, which helps extend the tool's lifespan. • The detachable, dust-proof grate protects the internal components from debris, increasing the tool's longevity. • Quick Guard Adjustment – Tool-free guard positioning for flexibility across different applications. • Ergonomic & Slim Grip – The slim body design provides comfort, balance, and better control during extended use. • All REDSTRIPE machines are compatible only with REDSTRIPE batteries.



Art.-no. 5702519032

P. Qty./unit 1

Industrial wet and dry vacuum cleaner ISS 40-M AUTOMATIC

Clever system features

- Dust class M certification guarantees a dust collection efficiency of 99.9 % in accordance with EN 60335-2-69
- Flat container head for placing or attaching Würth system cases
- Built-in storage with quick-action connections for the crevice nozzle and tool sleeve and recesses for the flexible hose and power cord mean accessories are always right where you need them
- Robust container with bumpers and large, sturdy metal rollers make it easy to use on construction sites
- Antistatic treatment with earthed connection supports and electrically conductive accessories (included in the scope of delivery) to dissipate static charges and reliably protect against electrostatic charges

Convenient operation

- Easy operation and control of the various functions, including on/off switch, 15 s/60 s filter cleaning switch, speed control switch and hose selection switch
- Easy to use with automatic power tool detection via Hall sensor in the socket, which allows the vacuum cleaner to be controlled by the connected power tool

Automatic filter cleaning system

- The pleated filter is cleaned automatically by an air blast at the selected time intervals (15 or 60 seconds)
- Allows long operation without interruptions
- Quiet operation
- Long filter service life
- Low maintenance costs



Art.-no. 07011430

P. Qty./unit 1

CONSUMABLES



Electrical insulating tape

Safe insulation and labelling during electrical installation

- DE-tested in line with DIN EN 60454-3-1 Type 5
 - Safe thanks to tested properties
 - Up to 40 kV/mm dielectric strength
 - Flame-retardant

Chemical basis	Acrylate, soft PVC foil
Dielectric strength	40 kV/mm

Colour	Width	Length	Art. no.	P. Qty./unit
Black	15 mm	10 m	0985 101	10
Black	30 mm	25 m	0985 101 1	5
Blue	15 mm	10 m	0985 105	10
Brown	15 mm	10 m	0985 104	10
Green	15 mm	10 m	0985 109 2	10
Grey	15 mm	10 m	0985 109 1	10
Red	15 mm	10 m	0985 103	10
White	15 mm	10 m	0985 102	10
Yellow	15 mm	10 m	0985 107	10
Yellow-green	15 mm	10 m	0985 109	10




Coloured cable tie with plastic tongue closure

For quick, problem-free and reliable bundling of cables, cable harnesses, hoses etc. with colour coding


Material	PA - Polyamide
Width	3.5 mm
Length	200 mm
Min./max. bundle diameter (bundle-Ø min./max.)	3-55 mm
Min./max. temperature resistance	-15 to 85 °C
Silicone-free	Yes
Halogen-free	Yes

Colour	Art. no.	P. Qty./unit
Red	0502 410	100
Orange	0502 420	100
Yellow	0502 430	100
Green	0502 440	100
Blue	0502 450	100

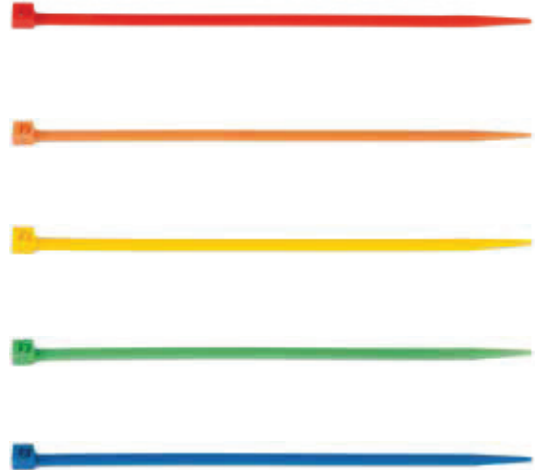

Hellermann Cable Tie 200mm x 4.6mm 100pcs

Colour	Art. no.	P. Qty./unit
Blue	5997 770 812	100
Yellow	5997 770 808	100
Green	5997 770 810	100

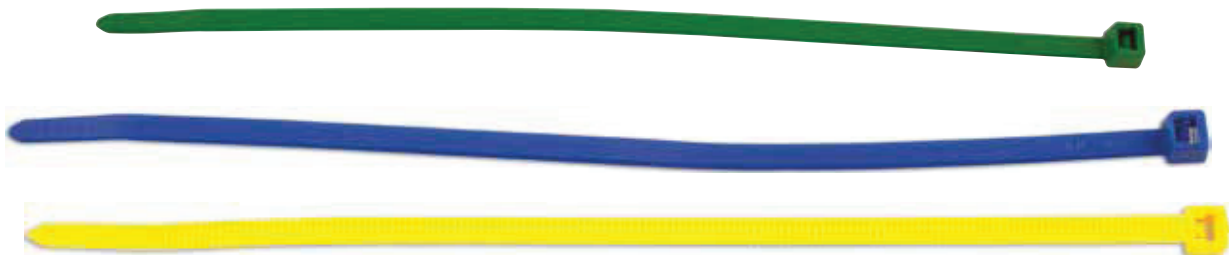

Plastic end grommet For rigid electrical conduits

Edge protection - no time-consuming deburring of the electrical conduits required



Art.-no. 975265716

P. Qty./unit 1

Multi sizes

Hose clamp

Asymmetrical housing, smooth, embossed band interior and rounded edges

- Uniform force distribution due to asymmetrical housing
- The asymmetrical design prevents the clamp head from tilting away when tightening
- No injury or hose damage due to the smooth, embossed band interior and rounded edges



Art.-no. 0539120

P. Qty./unit 1

Self-closing braided hoses

- Quick, easy installation
- Optimal mechanical protection
- The highly flexible hose adapts to the shape of the cable bundle
- Easy to re-install after adding or removing cables
- Easy to cut either hot or cold



Art.-no. 77143000

P. Qty./unit 1

Pipe fastening clamp DIN 3016, shape D, A2 stainless steel

For the easy attachment of hoses, cables and pipes



Art.-no. 495076

P. Qty./unit 1

Transparent condensate hose without fabric

- Wall thickness of 2 mm ensures stability and resistance to kinking
- Transparent colour allows easy visual control of the flow

Art.-no. 8685801

P. Qty./unit 1



SAFETY-PPE



IMPACT CAP

Art.-no. 899200980
Multi sizes



EAR PLUGS X-100

Art.-no. 899300331



DISPOSABLE GLOVES NITRILE POWDER-FREE, BLACK

Art.-no. 8994702
Multi sizes



SAFET SHOE S1P - HIGH AND LOW CUT

Art.-no. 53570500/53570200
Multi sizes from 39-46



SAFETY GOGGLE EN166

Art.-no. 899102023



TIGERFLEX PLUS PROTECTIVE GLOVES

Art.-no. 899411020
Multi sizes



CUT PROTECTION GLOVE

Art.-no. 899403609
Multi sizes



SAFETY SHOE S3

Art.-no. M4181390
Multi sizes from 39-46



Impact cap

Sporty head protection with a modern baseball cap design for any applications with a risk of impact to the head.

- Outer material: 100% cotton
- Hard plastic inner shell
- Foam padding on the shell and built-in ventilation holes for comfort
- Adjustable with riptape fastening
- Built-in sweatband
- Covering washable at up to 30°C



Art.-no. 899200980

P. Qty./unit 1

Multi sizes

SAFETY GOGGLE EN166

Sporty head protection with a modern baseball cap design for any applications with a risk of impact to the head.

- Outer material: 100% cotton
- Hard plastic inner shell
- Foam padding on the shell and built-in ventilation holes for comfort
- Adjustable with riptape fastening
- Built-in sweatband
- Covering washable at up to 30°C



Art.-no. 899102023

P. Qty./unit 1

Ear plugs x-100

Ergonomic, cone-shaped disposable ear plugs for use in extremely noisy environments

Outstanding insulation properties

Excellent voice recognition

Very comfortable for maximum user acceptance

Closed surface prevents the penetration of foreign bodies and dirt particles in the plugs

Imprinted X shape provides a number of advantages:

- Reduces contact pressure at the entrance to the ear canal
- Soft and optimum adjustment to the ear canal
- Quick and simple to insert correctly
- Easy to remove

Art.-no. 899300331

P. Qty./unit 1



TIGERFLEX Plus protective gloves

Versatile, comfortable work glove in original TIGERFLEX design for optimum grip

Outstanding comfort

- Skin-friendly, soft backing fabric that is seamlessly knitted all around
- Elasticated knitted cuffs
- Breathable coating made of nitrile foam

Original TIGERFLEX coating

- Excellent grip and optimised mechanical resistance
- Exceptional, eye-catching design
- Combines functionality and design

Further advantages

- Oeko-Tex Standard 100 for very good skin compatibility

Art.-no. 899411020

Multi sizes



Disposable gloves nitrile Powder-free, black

Liquid-proof, thin disposable gloves, tested as food-safe

- Protective glove made from nitrile
- Textured palm
- Silicone-free manufacturing process
- Powder-free
- Can be worn on both hands



Art.-no. 8994702

Multi sizes

Safet Shoe S1P - High and Low cut

Comfortable work shoes provide ideal protection for your feet while you work

Conforms to EN ISO 20345:2022 S1P

High Comfort

- Breathable upper made of embossed buffalo split leather
- Leather thickness: 1.4-1.6mm
- Oxford collar with sandwich lining
- Weigh approx. 1300g/pair for size 42

High Security

- Steel toe cap protects against impact of 200 Joule
- Steel midsole offers perforation resistance
- Slip resistance, oil resistance dual-density PU/PU outsole
- Anti-slip
- Antistatic
- Energy absorption at seat region



Art.-no. 53570500/53570200

Multi sizes from 39-46

Cut protection glove

Universal, very comfortable cut protection glove with touch screen capability and additional reinforcement in the crook of the thumb

Ideal for operating screens with a capacitive touchscreen

Maximum comfort

Extremely breathable nitrile foam coating

Additional reinforcement in the crook of the thumb

Extended service life

Optimal fit and outstanding tactile and touch sensitivity

Suitable for precision work in dry conditions with high cut protection requirements



Art.-no. 899403609

P. Qty./unit 1

Safety Shoe S3

Lightweight and breathable shoe made from soft microfibre

- Breathable upper made from very lightweight microfibre
- Breathable textile lining
- Plastic protective toe caps, fabric anti-perforation protection
- Slip-resistant PU outsole SRC, comfort with 11
- Metal-free
- approx. 480 g / shoe in size 42



Art.-no. M4181390

Multi sizes from 39-46

High-vis vest

With hook-and-loop fastening

- Two 5-cm wide all-round reflective strips
- Individually packed in polythene bags

Application area

Road and rail traffic, hazard zones, construction industry, road construction and surveying



Colour: Orange

Size: XL

Art. no. 0899 078

P. Qty./unit 1



Colour: Yellow

Size: XL

Art. no. 0899 078 002

P. Qty./unit 1

Electric Shock First Aid Poster

The Electric Shock First Aid Poster explains the precautions that you should be aware of when dealing with electric shock victims.



Art. no. 5997 770 855

P. Qty./unit 1

High Voltage/No Admittance Sign (without text)



Art. no. 5997 770 809

P. Qty./unit 1

Danger High Voltage Sign (without text)



Art. no. 5997 770 832

P. Qty./unit 1

Multi-standard dungarees

Anti-static dungarees that can handle your day-to-day work.

- Flame retardant, anti-static, concealed zip
- Two front pockets, back pocket with flap, large thigh pocket, ruler pocket
- Reflective piping
- Adjustable straps with buckles, stretch inserts in the hip area
- Reinforced knees, double seams
- EN 1149-5, EN 13034, IEC 61482-2 class 1, EN ISO 11611 class 2, EN ISO 11612

Colour	Art. no.	P. Qty./unit
Grey, Black	M004 086...	1
Navy blue, Black	M004 087...	



EN 11612
heat protective
clothing for heat-
exposed work



EN 13034
protective clothing
against liquid
chemicals



ISO 1161
Protective clothing
for use in welding
and allied processes



EN 1149
Protective Clothing.
Electrostatic
Properties



EN 61482-2:2009
class 1 protective clothing
against the thermal hazards
due to electric arcing



tops	XS = 010, S = 000, M = 001, L = 002, XL = 003, XXL = 004, 3XL = 005, 4XL = 006
pants	24 = 401, 25 = 403, 26 = 405, 27 = 407, 28 = 409, 29 = 411, 30 = 413, 40 = 417, 42 = 419, 44 = 321, 46 = 423, 48 = 425, 50 = 427, 52 = 429, 54 = 431, 56 = 433, 58 = 435, 60 = 439, 62 = 443, 64 = 447, 66 = 451, 90 = 457, 94 = 459, 98 = 461, 102 = 463, 106 = 465, 110 = 467, 114 = 469, 118 = 471



TECHNICAL CHEMICALS



G40 COOLANT/ LSCB-104Q

Characteristics:

- Protects against corrosion, cavitation, overheating, and freezing
- Safe on all cooling system materials
- Free of nitrites, amines, phosphates, and borates
- Meets standards from major vehicle and machinery manufacturers
- Dilute before use as recommended by the manufacturer

Main Advantages:

- Manufacturer-approved technology
- Protects radiator, water pump, hoses, and internal passages
- Prevents deposit buildup and clogging
- Free of substances that could damage system parts

Art.-no. 5861500122

P. Qty./unit 1



MULTI-PURPOSE LUBRICANT ULTRA 2040

Colour	Light yellow
Smell/fragrance	Perfumed
Contents	500 ml
Silicone-free	Yes
Min./max. temperature conditions	0.01 to 130 °C
Shelf life from production	24 Month



Lubricant, penetrating and water displacing agent

- Loosens seized and rusted parts
- With PTFE and 360° valve
- Silicone-free
- Removes moisture from electrical systems
- Strong water displacement effect

Art.-no. 890085500

RUST REMOVER ROST-OFF

Contents	400 ml
Container	Aerosol can
Chemical basis	Mineral oil



High capillary activity

Optimum creeping properties produce a high degree of rust penetration, i.e. even stubborn, rusted-on screw connections are removed

Optimum rust removal

Penetrates rust and loosens seized screws and bolts

Excellent water displacement

Displaces and penetrates moisture, e.g. in the case of contact difficulties

Art.-no. 890200004

HAND CLEANER IN TUB

Microplastics-free hand cleaner for medium to heavy soiling with natural perlite exfoliating agents. For dispenser system art. no. 0891901

Skin-friendly

- Cleans and protects
- High proportion of substances with prophylactic effect prevent skin irritation
- pH-neutral and soap-free
- Dermatologically tested



Art.-no. 893900001

P. Qty./unit 1

INTERIOR CLEANER

Special cleaning foam with anti-static additive for the entire vehicle interior

- Cleans all painted and plastic parts, glass surfaces and upholstery. Removes nicotine odours and leaves a pleasant fresh scent in the interior.
- The anti-static additive creates temporary anti-dust protection on the surface for longer lasting cleanliness in the vehicle interior.
- Works intensively to reliably remove stubborn dirt, even on vertical and sloped surfaces
- Silicone-free



Art.-no. 893033

P. Qty./unit 1

HHS 2000 ADHESIVE LUBRICANT

For silent performance

- Eliminates creaking and squeaking noises
- Outstanding creepage and penetrating properties

Reliable adhesion and protection

- Long-lasting lubricant with excellent adhesion
- Lubricant does not shear on fast-turning and rotating parts

Versatile compatibility and protection

- Protects and maintains O-rings and X-rings
- Does not affect painted base materials
- Plastic compatibility due to special formula

Minimises wear

- Reduction of friction temperature for longer lubrication



Art.-no. 893106

P. Qty./unit 1

TRIATHLON ENGINE OIL

Outstanding smooth-running and wear protection properties
Ideal for long oil change intervals

TRIATHLON engine oils are produced and packaged in compliance with the most stringent quality specifications in line with DIN EN ISO 9001

- High product safety
- Extensive manufacturer approvals

Only high-quality first raffinates and raw materials are used in TRIATHLON oils

Satisfies important specifications of automotive manufactures

Art.-no. 893033

P. Qty./unit 1

Multiple Grades



KLEBFIX SUPERGLUE

For bonding metal, plastic and rubber parts with and to each other in a matter of seconds

- Chemical basis: Cyanoacrylate acidic ester
- Colour: Transparent
- Density: 1.06 g/cm³
- Stretch capacity: 2 %
- Max. gluing gap size: 0.1 mm
- Min./max. temperature conditions: -30 to 80 °C
- Min./max. processing temperature: 5 to 35 °C
- Silicone-free: Yes
- Solvent-free: Yes
- Shelf life from production/conditions: 15 Month / at room temperature

Art.-no. 089309 701 150

P. Qty./unit 1



SYSTEMS



REFILLOMAT 2.0

SIMPLE, REUSABLE, ECONOMICAL.

An intelligent refill system that enables reusable spray cans to be refilled from bulk containers, reducing waste, lowering costs, and ensuring continuous availability of maintenance chemicals.

Simple

Insert the reusable can into the REFILLO®mat 2.0, wait until it is filled safely and automatically, unlock it and continue working immediately with a full can.

Reusable

Refilling instead of discarding! The refillable reusable can produces significantly less waste compared to conventional disposable cans! Less packaging, more added value.

Economical

Active ingredients in bulk packaging are cheaper than in conventional individual spray cans. This means that the REFILLO®mat 2.0 is not only practical, but also saves money every day with every can filled.

Smart

The digital display guides you intuitively through the filling process and provides an overview of the fill levels. The operating materials are thus reordered automatically and in good time.



REFILLOMAT T90 2.0 SAFETY CABINET

A certified T90 fire-resistant safety cabinet designed to securely store REFILLOmat 2.0 refill stations and flammable operating materials while ensuring maximum workplace safety and compliance.

Key Benefits

- T90 Fire Protection
- Safe Hazardous Material Storage
- Regulatory Compliance
- Secure Access
- Space Optimization
- Improved Workplace Safety
- Integrated REFILLOmat Solution





ORSY®MAT FP Flap based vending machine

The flap based vending machine is a real all-rounder and enables the storage and provision of various articles and consumables.

The ORSY®mat FP is available in ten variants with up to 72 flaps. Due to the different flap sizes, this vending machine type is suitable for very large items such as protective helmets or work shoes.

In addition, the ORSY®mat FP is used for transparent returnable handling, e.g. by securely storing, dispensing and re-stocking machines after use.



ORSY®MAT RT Rotation system for various items

The ORSY®mat RT is particularly suitable for manufacturing companies that require a large number of different small to medium-sized auxiliary and operating equipment.

It offers 4 to 48 compartments per level and can therefore be used to supply up to 384 different items.

The compartments store the items securely, allowing the machine to be filled with single items regardless of the packaging unit.



ORSY®MAT HX Helix based vending machine

Our helix based vending machine can be individually assembled according to your requirements with regard to assortment variety, item size and quantity.

One ORSY®mat HX machine offers space for up to 48 different products and 1,000 units.

This vending machine model is particularly suitable for the individual removal of auxiliary and operating materials as well as industrial safety articles. The machine recognises the removal of the last item of a packaging unit and then triggers its automatic re-ordering.



ORSY®MAT DR LIGHT Drawer based vending machine

The drawer-based vending machine is particularly suitable for storing, stocking and dispensing high-quality or particularly sensitive items, such as tools, maintenance materials, measuring and testing equipment.



ORSY®mat WGT – WEIGHING SYSTEM

The ORSY®mat WGT recognises withdrawal of an item on the basis of the integrated load cells, which store the weight of the deposited item. This technology allows you to withdraw individual items independent of the packaging unit. In addition, it is possible to withdraw several items from the machine at the same time - as is the case with an ordinary material cabinet. As soon as the machine is closed after removal, it automatically takes stock of the items.

Due to load cells in different sizes, the system is suitable for managing almost all types of auxiliary and operating materials. Even large-volume items such as protective suits, leather gloves or large grinding wheels can be optimally stored in the ORSY®mat WGT. One vending machine can store maximum 80 different items.

If several vending machines with weighing systems are used, they are networked with each other. In this case, one dispensing system is used for control, which means that all existing units can be accessed with a single login.



ORSY®mat CHE – THE HAZARDOUS SUBSTANCE SYSTEM

Chemical-technical products such as brake cleaners, lubricants or corrosion protection sprays are essential in production, maintenance and servicing. However, the procurement often involves many manual processes and the storage is usually carried out in a central hazardous material warehouse. This costs you a lot of time and money.

The hazardous materials system ORSY®mat CHE is used for the safe, legally compliant and clear storage of hazardous materials. Like the other ORSY®mat models, the system also recognises item withdrawals and automatically triggers re-orders if necessary. This means you can also rely on a secure supply of chemical-technical products.

The ORSY®mat CHE is available in two sizes and is suitable for both cans and canisters. The number of levels is variable so that the storage space is optimally used.



WÜRTH RAPID RESPONSE

With over 30 years of development behind it, Würth Vehicle Equipment delivers premium storage solutions for work vehicles worldwide – around 50,000 systems installed each year. Designed in-house and produced by a Würth subsidiary, it turns your vehicle into a workspace that keeps pace with you.

Quality, Durability, Efficiency



Built from high-quality materials in state-of-the-art facilities and assembled by trusted professionals. Every component is load-bearing yet lightweight, keeping fuel consumption down without compromising safety.

Safe and Sound Storage

Rigorously crash-tested for structural integrity and long service life. A full range of load-securing equipment and connection elements keeps everything in place in transit.

Tailored to Your Needs

We plan your setup around your vehicle and your work. Our team measures your van, truck or car – accounting for side doors, rear doors and boot space – and combines preassembled components with the specific storage modules you need.

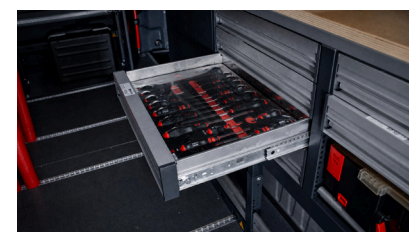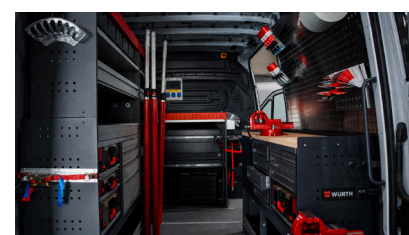



WÜRTH PROFESSIONAL SOLUTIONS LLC.
T: +971 (4) 559-3037
Email: info@wuerth-professional.com
Website: www.wuerth-professional.com

We reserve the right to make product alterations that, in our view, improve quality at any time without prior notice or dissemination. Illustrations may be published for example purposes only and the appearance of supplied goods may vary. We reserve the right to make errors. We do not accept any liability for printing errors. Our general terms and conditions of business apply.