




WÜRTH

PROFESSIONAL SOLUTIONS

WINDOW INSTALLATION

DECADES OF MASTERY | TRANSFORMATIONAL RESILIENCE

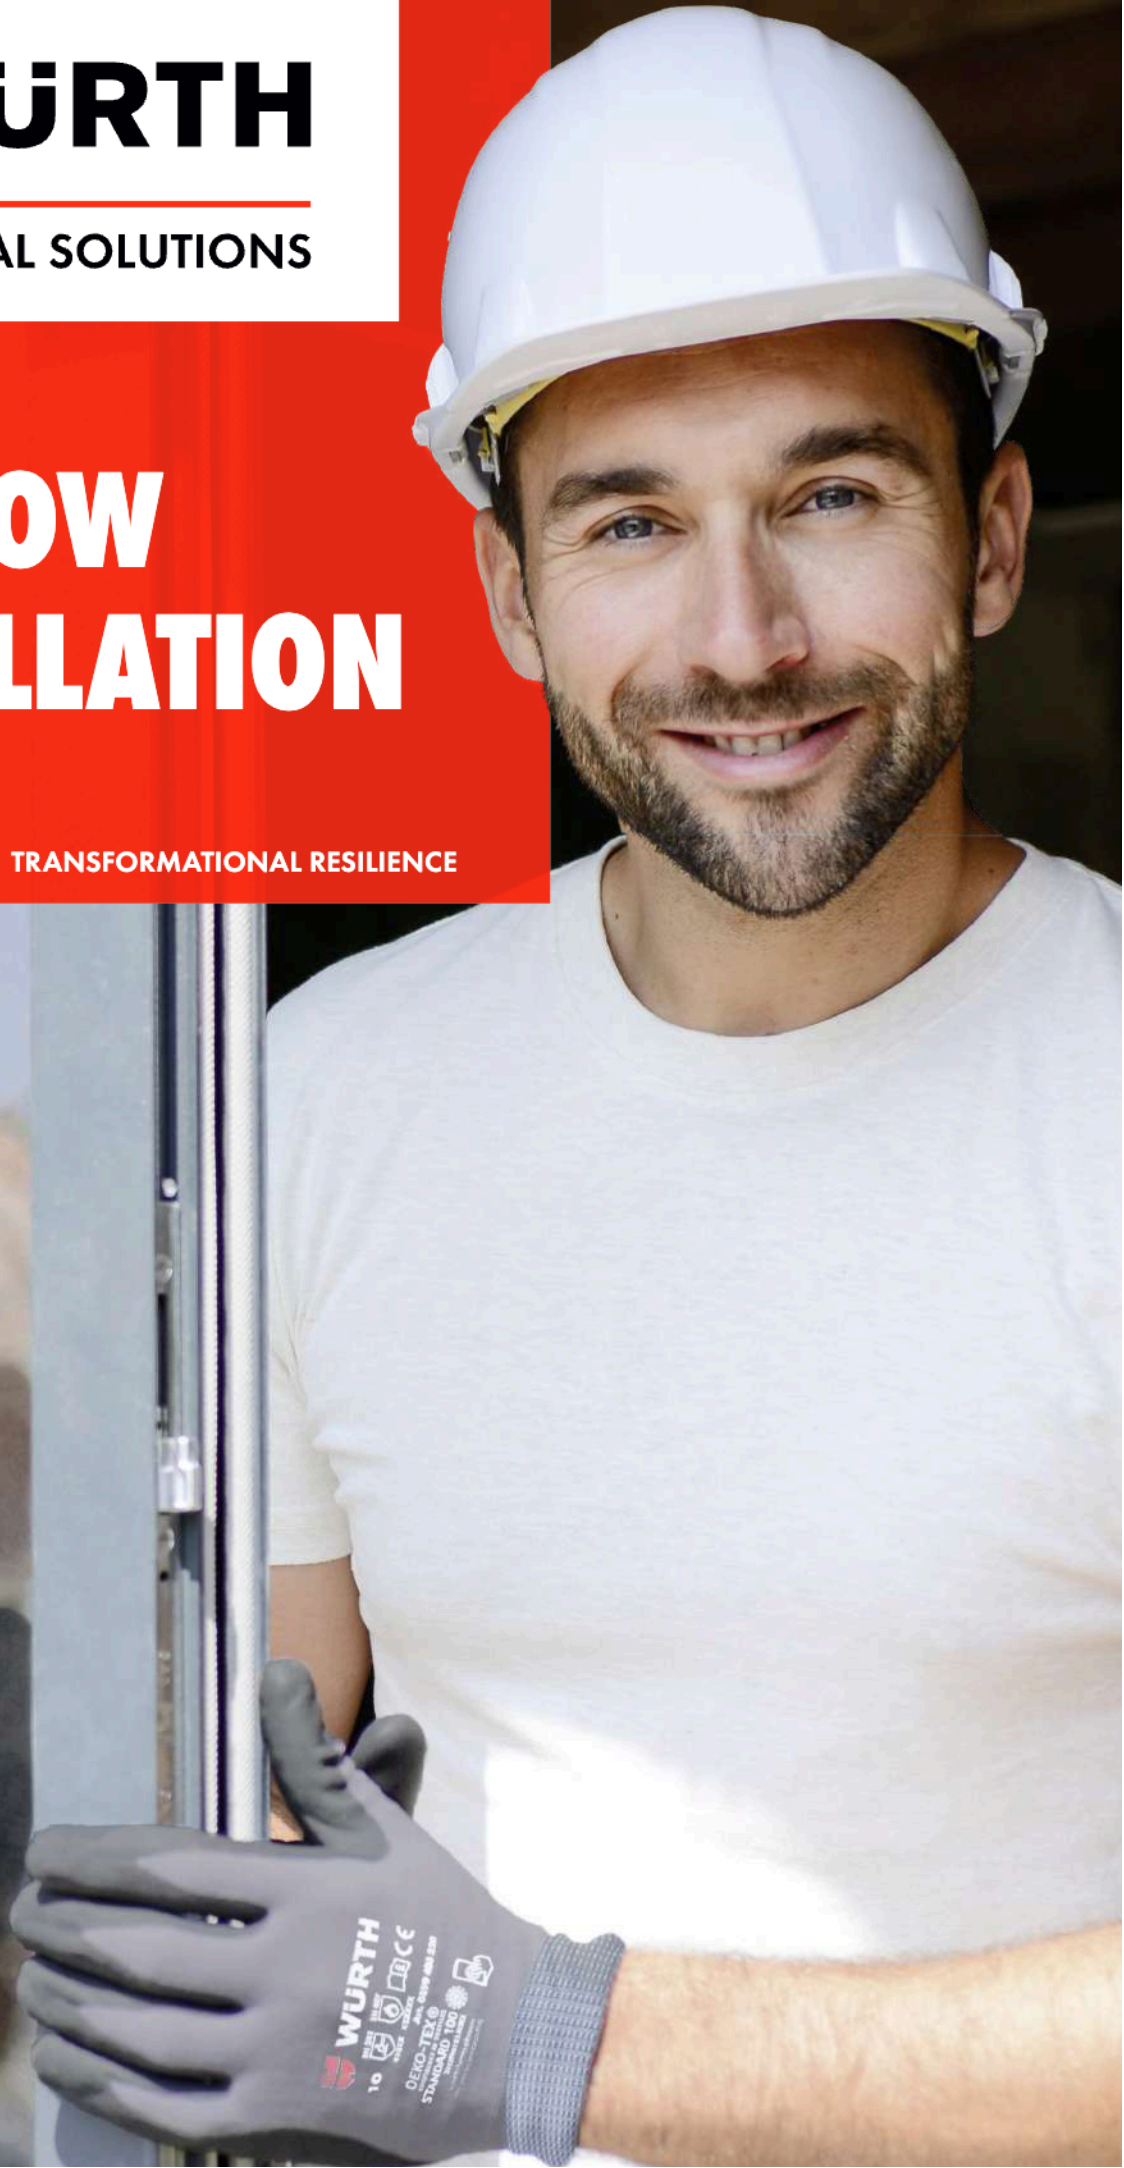

One-handed clamp from VIKING ARM
High-quality, one-handed assembly tool
for the professional tradesperson


- Even more accurate, millimetre-precise adjustment thanks to the improved calibration unit
- Fast and simple installation of heavy objects thanks to a load limit of 150 kg
- High stability because of the high-quality, black carbon steel
- Easy to operate with only one hand
- Ideal for using to raise, lower or clamp and also to spread

Art. no. 0714 662 980

P. Qty.: 1

Product description

Max. external clamping width (L1 max.)	215 mm
Min./max. internal clamping width	155-380 mm
Loose Overhang (L2)	38 mm
Profile thickness	6 mm
Tension force	1.5 kN
Max. internal clamping width (L max.)	380 mm

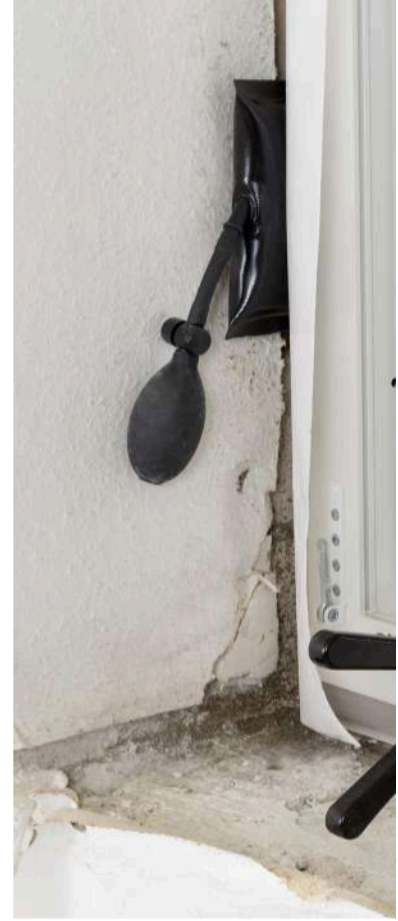

Window installation tool set
For the fast and simple assembly of windows and doors

- Rotating the handle pushes the two metal plates against one another, allowing very precise adjustment and bracing of the windows during installation.
- The smooth surface of the metal plates means the window can still be aligned after bracing.
- Handle made from 2-component plastic
- Flexible shank between handle and metal plates
- Can be used even in tight spaces

Art. no. 0715 67 120

P. Qty.: 2

Product description

Min./max. spreading height	10-21 mm
Length	360 mm
Spreading range	21 mm





Inflatable Amo bag air cushion
For rapid positioning and spacing when installing windows

Prevents scratches

Soft air cushion protects casing and frame

No wedges required

Amo bags can be reused again and again

Joints are clear

Immediately ready for completion with mountings and joint compound


Art. no. 0715 67 80

P. Qty.: 4



Product description

Min./max. joint width	3-50 mm
Load-bearing capacity (single direct)	100 kg
Material	Fibre-reinforced plastic

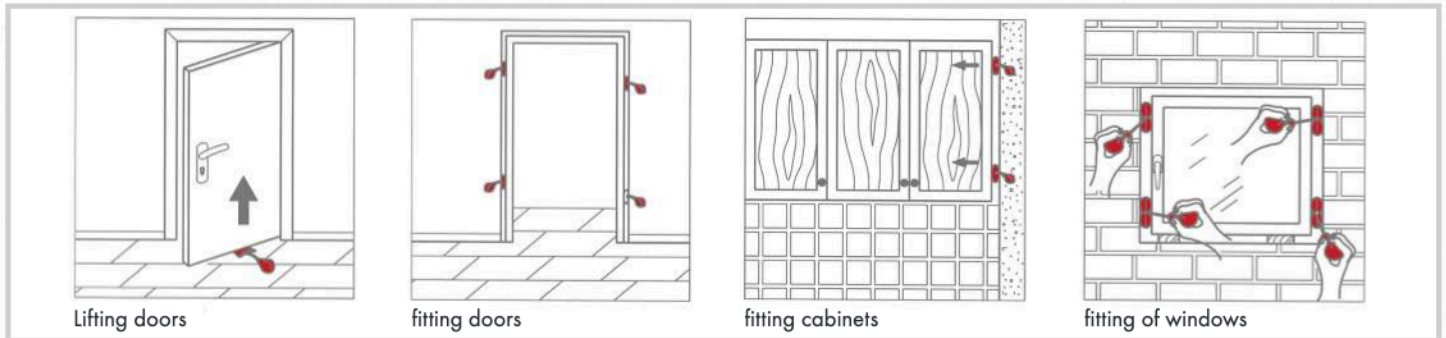

AMO® III 7.5 type 2 window frame screw

For fastening windows in concrete and solid block masonry with small cylinder head. Zinplatedsteel, blue passivated



AMO® IV 7.5 MM window frame screw

This innovative form of window installation combines performance with ease of installation



AMO®-Combi 7.5/11.5 window frame screw

The universal solution for attaching windows in concrete, perforated and solid brickwork and wood




AMO®-Y window frame screw dia. 7.5 mm

Spacing assembly screw ideal for window and door mounting in aerated concrete, concrete as well as solid and perforated bricks. Optimised thread geometry and special coating



Product description	Length	Internal drive	Art. no.	P. Qty
AMO® III Ø 7.5 mm	132 mm	RW30	0234 830 132	200
AMO® IV Ø 7.5 mm	132 mm	RW30	0234 631 132	200
AMO® Combi Ø 7.5 mm	150 mm	RW30	0234 030 150	100
AMO®-Y Ø 7.5 mm	152 mm	AW30	0234 630 152	200

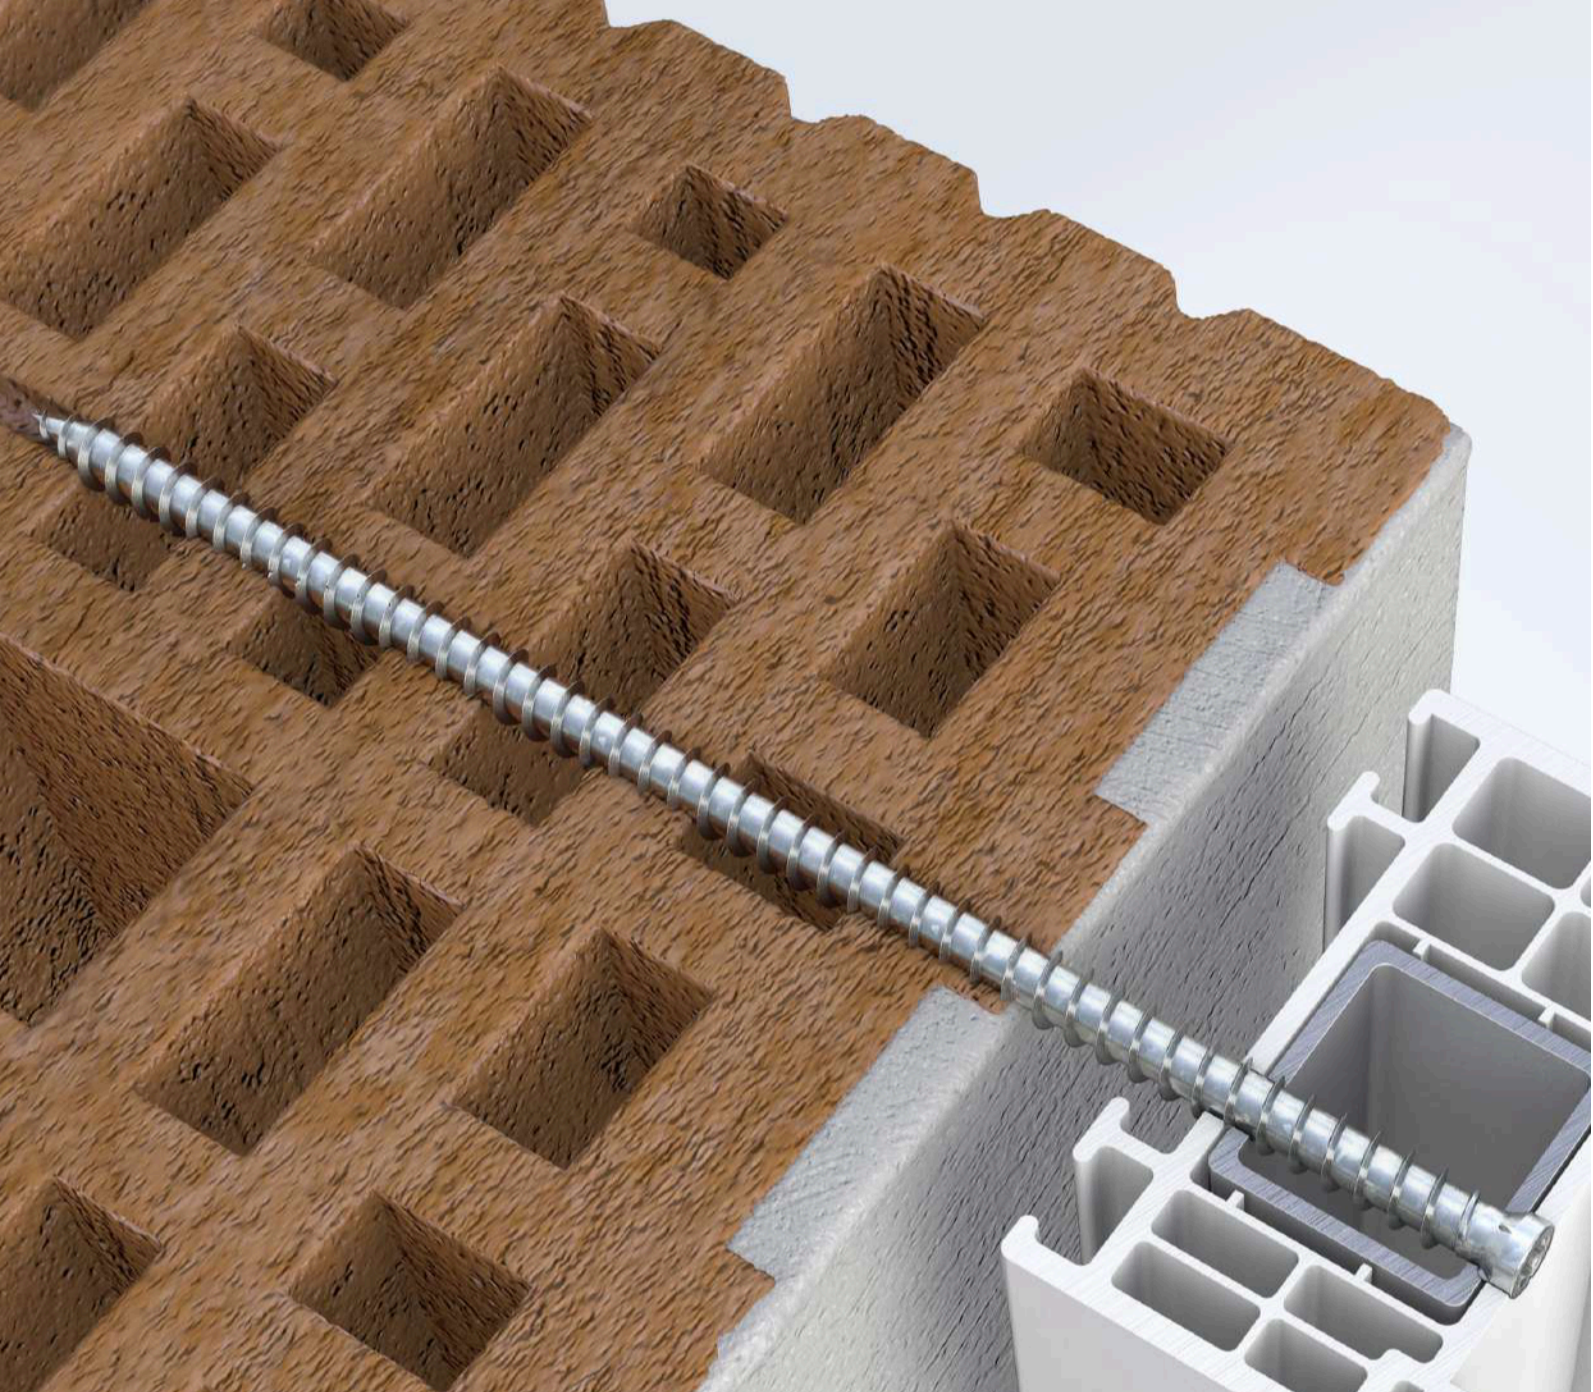

WINDOW INSTALLATION

WÜRTH PROFESSIONAL SOLUTIONS LLC.

T: +971 (4) 559-3037

Email: info@wuerth-professional.com

Website: www.wuerth-professional.com

We reserve the right to make product alterations that, in our view, improve quality at any time without prior notice or dissemination. Illustrations may be published for example purposes only and the appearance of supplied goods may vary. We reserve the right to make errors. We do not accept any liability for printing errors. Our general terms and conditions of business apply.